



- CON 1**
- MATERIAL :**
 - 1-1. HOUSING : PA66 ; COLOR : WHITE.
 - 1-2. CONTACT : BRASS.
 - 1-3. NUT : PA66 ; COLOR : RED.
 - 1-4. O-RING : SILCON ; COLOR : BLACK.
 - FINISH :**
 - 2-1. CONTACT : GOLD PLATED.

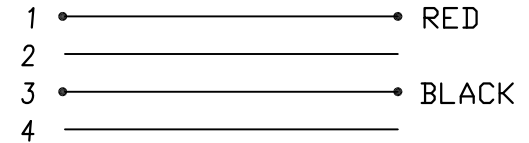

CON 1 PIN ASSIGNMENTS



ITEM	DESCRIPTION	Q'TY
4	Heat Shrinkable Tube ; COLOR : RED . WORD : BLACK.	1
3	SR : PVC ; COLOR : RED.	1
2	4PIN FEMALE	1
1	PVC RED 16Awg*2C ; OD=7.2(TIN PLATED WIRE) Operation Temperature : -20℃~85℃ Water proof: IP67	1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ±

PPOJECTION



ORDER INFORMATION

M13X1-040216-F2M5-LF

SERIES

LEADFREE
2500mm
FEMALE
16 AWG
4P2C

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: M13 4pin (F) POWER CABLE ; L=2.5M