

PCB LAYOUT/TOP VIEW



**SPECIFICATIONS**

**MATERIAL:**

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.35mm Thickness Alloy Selective Gold Plating

**ELECTRICAL:**

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 30 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

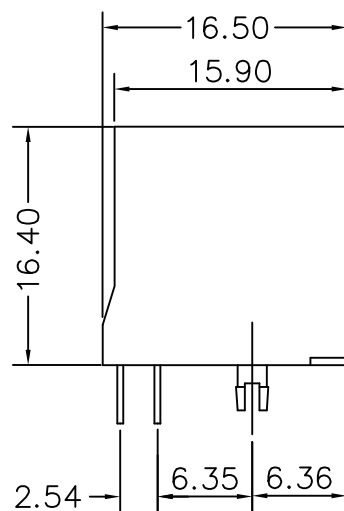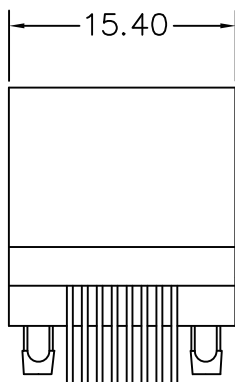

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1

DATE


SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ±  
ANG ±


PJECTION

**煜倫股份有限公司**

[www.morethanall.com](http://www.morethanall.com)



**ORDER INFORMATION**

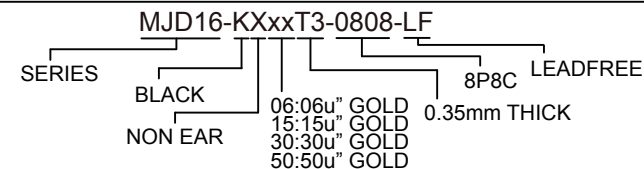

DESCRIPTION: