

Recommended P.C.B. Layout

### SPECIFICATIONS


- \* Current Rating : 1 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature: -40°-+105°C
- \* Max Processing Temp: 230° for 30~60 seconds  
(260° for 10 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: L.C.P (UL 94 V-0)

**RoHS Compliant**


TOLERANCES ARE



|                   |             |             |
|-------------------|-------------|-------------|
| DRAWING BY CY     |             | X. ± 0.50   |
| CHECKED BY GENIUS |             | .X ± 0.35   |
| UNIT / mm         | SCALE 1 : 1 | .XX ± 0.25  |
| DATE              |             | .XXX ± 0.05 |
|                   |             | ANG ±       |



**ORDER INFORMATION**

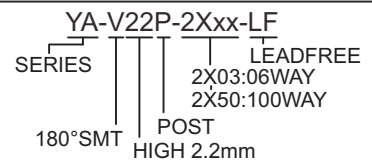

DESCRIPTION: 1.27X1.27mm SOCKET LOW PROFILE 2.2mm SMD TYPE

煜倫股份有限公司

www.morethanall.com

SIZE A4 PPROJECTION