


MATERIALS:

- HOUSING—DSM STANYL TE250F6 (NYLON46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V-0
 - CONTACTS—0.35mm THICK. PHOS-BRONZE PLATED
WITH HARD GOLD AND GOLD FLASH
IN SOLDER AREA.
 - SHIELD—0.25mm THICK. COPPER ALLOY,
PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

TINNED, SOLDER AREA

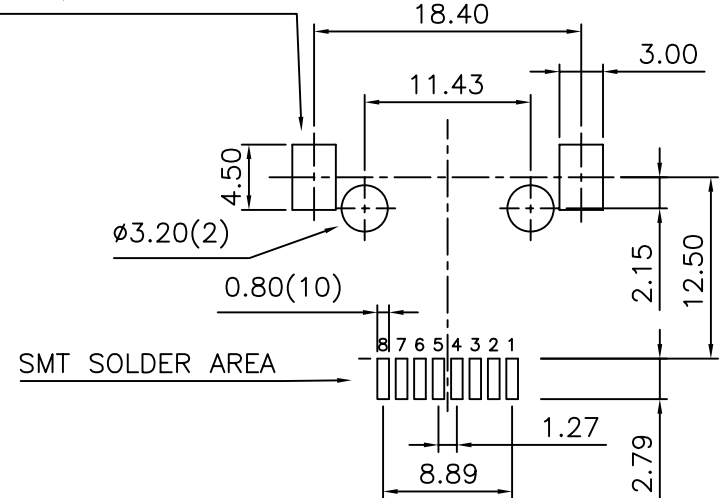

**PCB LAYOUT
Ref.**

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MJWF12-KF06P-0808LF

SERIES | POST | LEADFREE
8P8C
06u" GOLD
FULL SPRING
BLACK

DESCRIPTION: 8POSITION SIDE ENTRY, SMT TYPE VERY LOW PROFILE, SHIELDLESS PCB JACK