


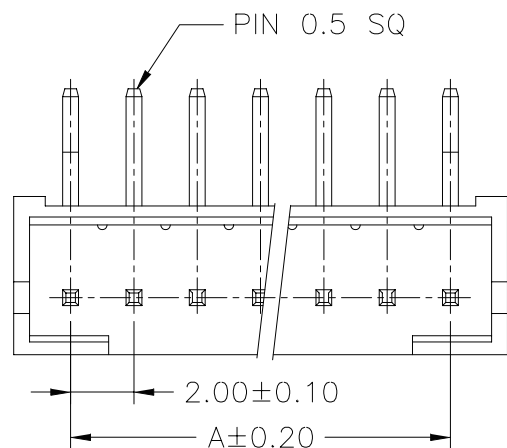



SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 800V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0

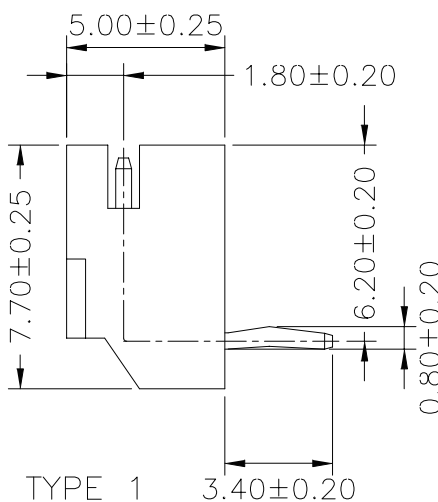

P.C.B LAYOUT

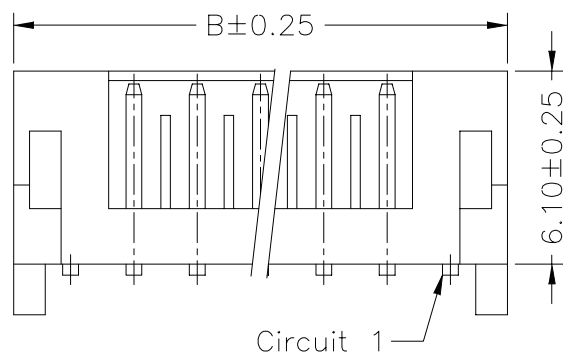

Ordering Information & Dimensions

| PART NO. | Dimensions | |
|-----------------|------------|-------|
| | A | B |
| ILS-R-02 | 2.00 | 6.00 |
| ILS-R-03 | 4.00 | 8.00 |
| ILS-R-04 | 6.00 | 10.00 |
| ILS-R-05 | 8.00 | 12.00 |
| ILS-R-06 | 10.00 | 14.00 |
| ILS-R-07 | 12.00 | 16.00 |
| ILS-R-08 | 14.00 | 18.00 |
| ILS-R-09 | 16.00 | 20.00 |
| ILS-R-10 | 18.00 | 22.00 |
| ILS-R-11 | 20.00 | 24.00 |
| ILS-R-12 | 22.00 | 26.00 |
| ILS-R-13 | 24.00 | 28.00 |
| ILS-R-14 | 26.00 | 30.00 |
| ILS-R-15 | 28.00 | 32.00 |

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PJECTION



ORDER INFORMATION



DESCRIPTION: 2.00mm PITCH 90° WAFER