


SPECIFICATIONS

- * Current Rating : 1 Amps
- * Insulator resistance: 5000 Megohms min.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40° $-+105^{\circ}$ C
- * Max Processing Temp: 230° for 30 seconds
(260° for 7 seconds)
- * Contact Material: Phosphor bronze
- * Housing: NL-6T (UL 94 V-0)

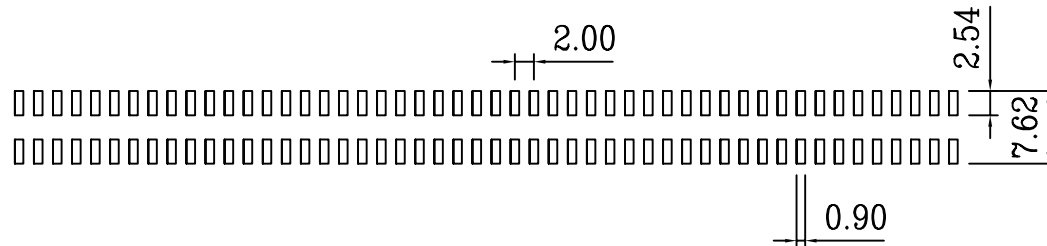

P.C.B.layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE


SIZE A4

PROJECTION

X. \pm
.X \pm 0.35
.XX \pm 0.25
.XXX \pm
ANG \pm



ORDER INFORMATION

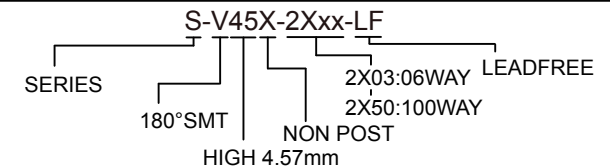

DESCRIPTION: 2.0mm Female Socket h=4.5mm type