




K型無接地片槽

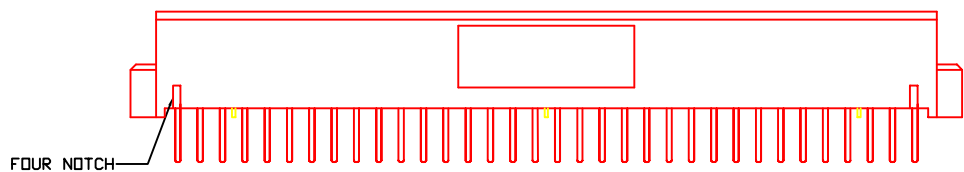

P型有接地片槽

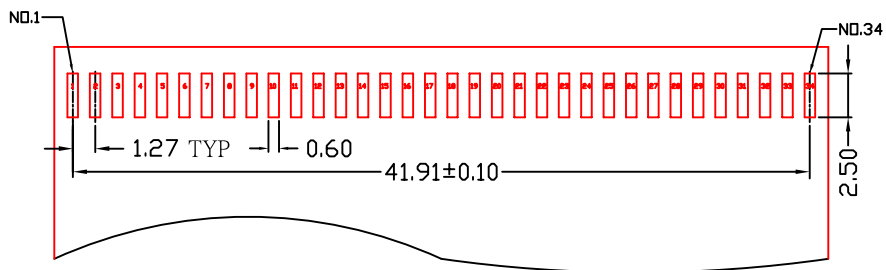

RECOMMENDED P.C.B LAYOUT

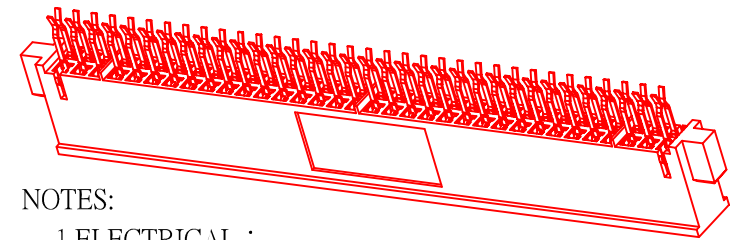

NOTES:

- 1.ELECTRICAL :
 VOLTAGE:100V
 CURRENT : 0.5A
 CONTACT RESISTANCE : 40MΩ MAX
 DIELECTRIC WITHSTANDING : 500V AC
 INSULATION RESISTANCE : 1000MΩ MIN
- 2.MECHANICAL :
 CONTACT RETENTION TO HOUSING : 4.9N MIN
 MATING FORCE : 39.2N MAX
 UNMATING FORCE : 6.67N MIN
 DURABILITY : 10,000 CYCLES
- 3.MATERIAL :
 INSULATOR : LCP
 COLOR : BLACK
 CONTACT : PHOSPHOR BRONZE
- 4.PLATING :
 CONTACT AREA : GOLD OVER NICKEL
 SOLDER TAIL AREA : TIN OR GOLD

附表一

代碼	電鍍方式
A	純錫半金
B	全金
D	霧錫半金
E	錫銅半金

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.20
 .XX ± 0.10
 .XXX ±
 ANG ±

P PROJECTION



ORDER INFORMATION

PCC-SE00-68-LF
 SERIES | LEADFREE
 68 WAY
 OFFSET 0.0mm
 EAR
 FEMALE

DESCRIPTION: PC母座STR式中耳有擋片 開口0.30外露2.50成品 (邊0.45)

www.morethanall.com