


MATERIAL:
 INSULATOR: PBT,UL94V-0,BLACK;
 CONTACTS: COPPER ALLOY;
 GOLD PLATED ON CONTACT AREA;
 TIN PLATED ON SOLDER TAIL;
 GUIDE: PBT, UL94V-0, BLACK;



ELECTRICAL:
 CURRENT RATING: 0.5A AC,DC
 TEMPERATURE RANGE: -20 °C ~ +60 °C
 INSULATION RESISTANCE: 1000M Ω MIN. (500V DC)
 CONTACT RESISTANCE: 40m Ω MAX.
 WITHSTANDING VOLTAGE: 500V AC/MINUTE

Pin Type	Interface Dim.	Pin No.
Detect	3.50 mm	36, 67
General	4.25 mm	all other pins
Power	5.00 mm	1, 17, 34, 35, 51, 68

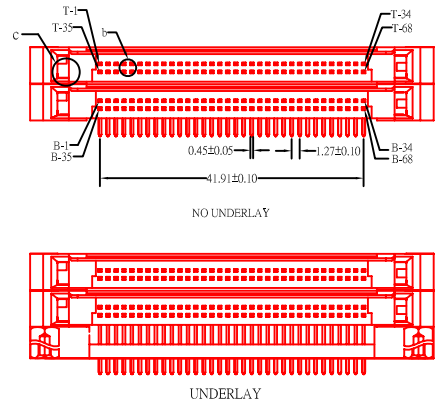

Ordering Information

A \ B	DIM. B = 1.1 mm (0) Voltage 5V		DIM. B = 2.2 mm (V) Voltage 3.3V	
	(O) A = 0.0 mm	PCCB1-PRL00V5-68	PCCB1-PRL00V3-68	
(G) A = 2.2mm	PCCB1-PRL22V5-68	PCCB1-PRL22V3-68		
(U) A = 4.0 mm	PCCB1-PRL40V5-68	PCCB1-PRL40V3-68		
(J) A = 5.0 mm	PCCB1-PRL50V5-68	PCCB1-PRL50V3-68		




RoHS Compliant

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 焜倫股份有限公司
 www.morethanall.com

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4 PPROJECTION

TOLERANCES ARE
 X, ±
 .X ± 0.05
 .XX ± 0.01
 .XXX ±
 ANG ±



ORDER INFORMATION

PCCB1-PRLxxVx-68-LF
 SERIES | | | | LEADFREE
 MALE | | | | 68WAY
 DIP 90° | | | | V3:3.3V
 LONG RAIL | | | | V5:5.0V
 00:STANDOFF 0.0mm
 50:STANDOFF 5.0mm

DESCRIPTION: