

“ ” : 2 PRONGS FOR STRANDED WIRE  
多芯線用二叉型金片

### 材質

1. 塑膠材質 Housing Material : ( Polycarbonate(PC) UL 94V-0 UL 94V-2 )
2. 金片型式 Contact Type : ( 二叉型金片 2 prongs for STRANDED wire 三叉金片 3 prongs for SOLID wire )
3. 鍍金厚度 Gold Plating : ( Fμ”(Flash) 3μ”(≥0.0762μm) 6μ”(≥0.1524μm) 15μ”(≥0.381μm) 30μ”(≥0.762μm) 50μ”(≥1.27μm) )
4. 金片材質 Contact Material : ( 青銅 Bronze 磷青銅 Phosphor Bronze )
5. 銅殼材質 Shield Material : 黃銅合金鍍鎳 Brass with nickel plating
6. 附件選項 Option : ( 分線架 Sled T套 Liner )

Remark:

1. 適用24或 26 AWG 線材。 Available for 24 or 26 AWG wire.

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT/ mm SCALE 1:1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION






ORDER INFORMATION

MP-RF5-0808-LF  
SERIES | 8P8C | LEADFREE  
| CAT 5 | FULL METAL  
| ROUND OUTLET

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com

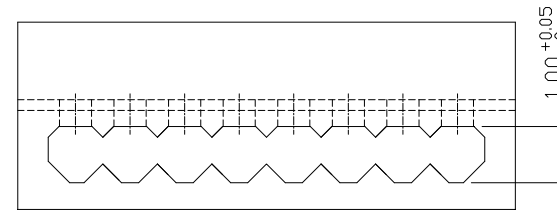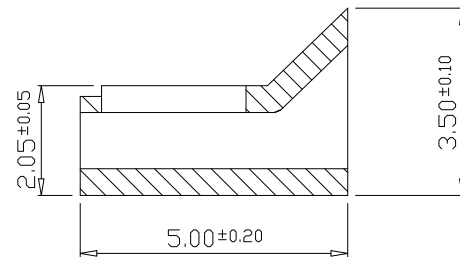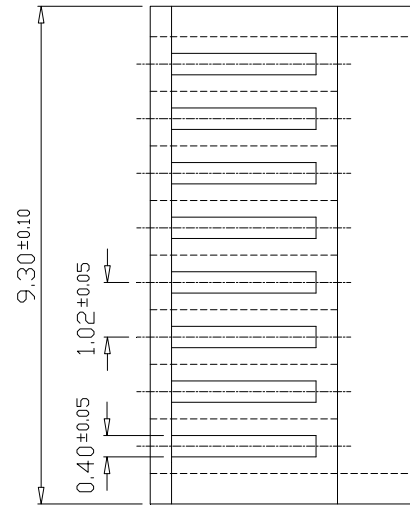

材質 Material :

1. 塑膠材質 Material : ( Polycarbonate(PC) UL 94V-0 UL 94V-2 )

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

P PROJECTION



**ORDER INFORMATION**

MP-RF5-0808-LF  
SERIES | 8P8C | LEADFREE  
| CAT 5 | FULL METAL  
| ROUND OUTLET

DESCRIPTION: