
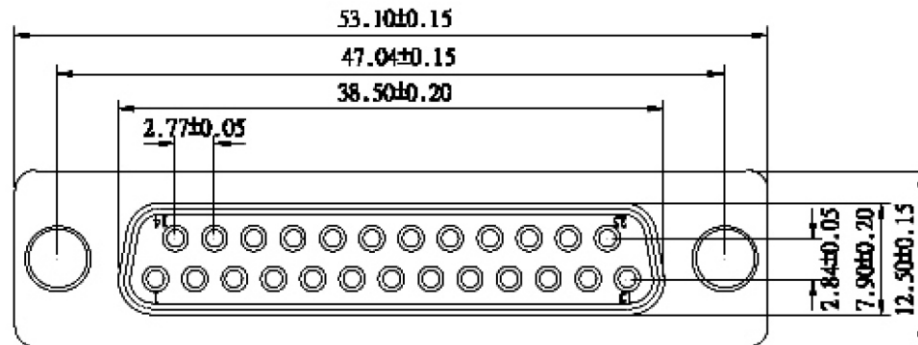


(DB9M/25F ADAPTOR)

PIN OUT: 09Male 25Female

1	-----	8
2	-----	3
3	-----	2
4	-----	20
5	-----	7
6	-----	6
7	-----	4
8	-----	5
9	-----	22
G	-----	G

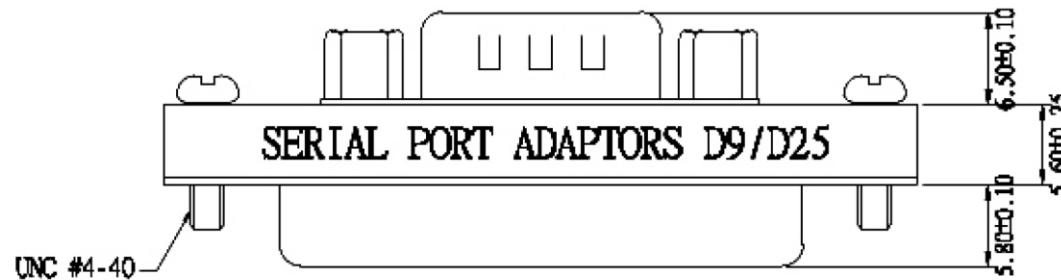

Label: orange color with white character
 One side: SERIAL PORT ADAPTORS D9/D25
 The other side: MINI ADAPTER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0
 CONTACT: Brass
 CONTACT PLATING: Gold plated over nickel
 SHELL: Tin plated shell (Nickel Silver)
 CURRENT RATING: 3 AMP
 DIELECTRIC STRENGTH: 500V AC for one minute
 INSULATOR RESISTANCE: 500MΩ min at 500V DC
 TEMPERATURE: -25°C—+105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PJECTION

X.±
 X±
 .XX±
 .XXX±
 ANG±



ORDER INFORMATION

DBX2-ES-0925-LF
 SERIES | LEADFREE
 | 09 TO 25 WAY
 MALE TO FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: