

NOTES:

1.MATERIAL

- 1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact: Brass
- 1.3 Contact Plating: Gold Plated
- 1.4 Shell: Gold (5U") Plated

2.SPECIFICATION

- 2.1 Current Rate:5 Amps
- 2.2 Insulator Resistance:1000M ΩMin. at 500V DC
- 2.3 Dielectric Strength:1000V Per minute
- 2.4 Operation Temperature:-55℃ to+105℃

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D
DR-PxNJ-09	16.92	24.99	30.81	11.08
DR-PxNJ-15	25.25	33.32	39.14	19.39
DR-PxNJ-25	38.96	47.04	53.04	33.24
DR-PxNJ-37	55.42	63.50	69.32	49.86

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE


SIZE A4

X. ±
X ± 0.50
.XX ± 0.30
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

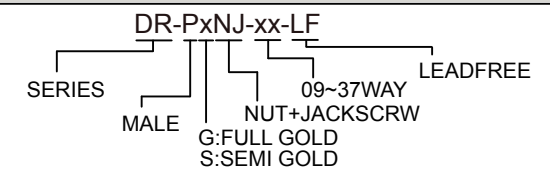

DESCRIPTION: DR 公叉鉚鎖黑 8.1 RoHS