


Features:

- \* With Polarizing Key & Optional Side Latches
- \* Material : PPO UL 94V-1 (Black)

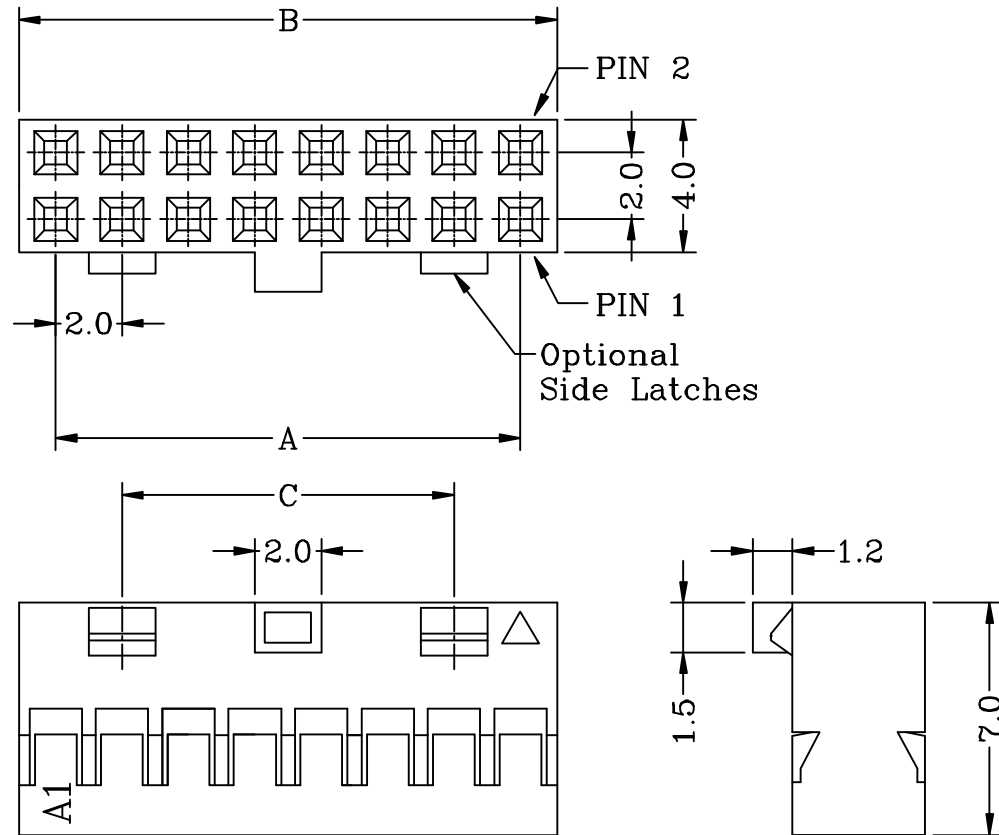

Dimensional Information:

Circuits	Dimensions			Pcs/Bag
	A	B	C	
4	2.0	4.2	-	1000
6	4.0	6.2	-	1000
8	6.0	8.2	-	1000
10	8.0	10.2	-	1000
12	10.0	12.2	-	1000
14	12.0	14.2	8.0	1000
16	14.0	16.2	10.0	1000
18	16.0	18.2	12.0	1000
20	18.0	20.2	14.0	1000
22	20.0	22.2	16.0	1000
24	22.0	24.2	18.0	1000
26	24.0	26.2	20.0	1000
28	26.0	28.2	22.0	1000
30	28.0	30.2	24.0	1000
32	30.0	32.2	26.0	1000
34	32.0	34.2	28.0	500
36	34.0	36.2	30.0	500
38	36.0	38.2	32.0	500
40	38.0	40.2	34.0	500
42	40.0	42.2	36.0	500
44	42.0	44.2	38.0	500
46	44.0	46.2	40.0	500
48	46.0	48.2	42.0	500
50	48.0	50.2	44.0	500
60	58.0	60.2	54.0	500

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES


DRAWING BY CY  
CHECKED BY GENIUS  
UNIT / mm SCALE 1 : 1  
DATE

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

煜倫股份有限公司

www.morethanall.com

SIZE A4 PROJECTION



ORDER INFORMATION

MPVK-HD-2Xxx-LF  
SERIES | LEADFREE  
2X02:04WAY  
2X30:60WAY  
D TYPE HOUSING

DESCRIPTION: 2.00mm pitch dual row crimp terminal socket