


Recommend PCB Layout

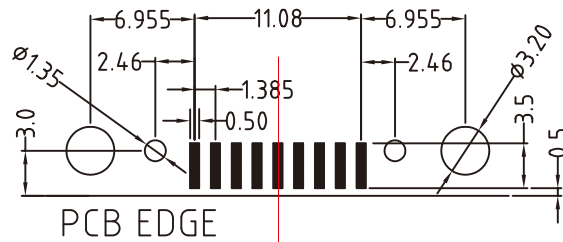

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amperes.
 Dielectric Withstanding Voltage: AC 500V at sea level.
 Insulation Resistance: 1000 Megohms Min.
 Contact Resistance: 30 Milliohms Max.
 Operation Temperature: -55°C to +105°C.

Material

Contact: Copper Alloy.
 Insulator: LCP. [Select PA6T /PA9T]
 Shell: SPCC.
 Z-Piece: Copper Alloy.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm
 DATE

SCALE 1:1

SIZE A4

P PROJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

DW-SNZ1-09-LF
 SERIES | CLIP | NUT | FEMALE
 | | | LEADFREE
 | | | 09WAY

DESCRIPTION: