


**SPECIFICATION**

1. Rating : DC 30V 0.5A ;
2. Contact resistance :  $\leq 0.03\Omega$  ;
3. Insulation resistance :  $\geq 100M\Omega$  (DC250V) ;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N;
6. life test : 5,000 cycles .

**SCHEMATIC**

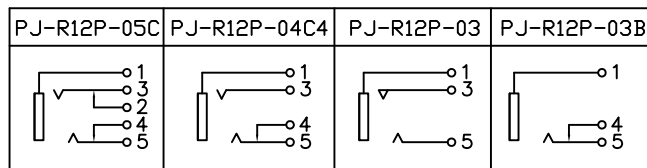

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
7	HOUSING	1	PBT/PA66	
6	COVER	1	PBT/PA66	
5	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
4	CURVE PIECE	1	H62 BRASS	Ag-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
2	CURVE PIECE	1	H62 BRASS	Ag-Plating
1	FLAT PIECE	1	H62 BRASS	Ag-Plating

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE


SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

P PROJECTION



**ORDER INFORMATION**

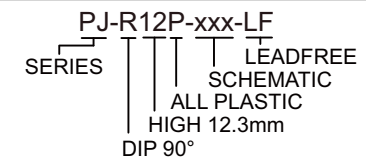

DESCRIPTION: