
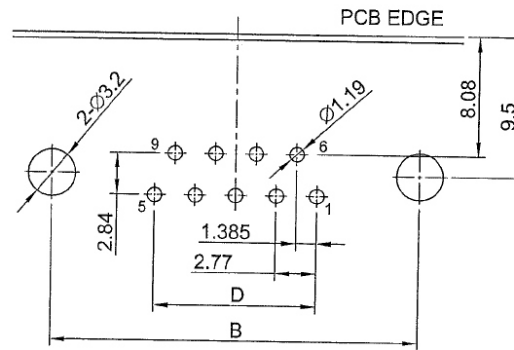


MATERIAL:

INSULATOR : PBT, UL 94V-0. Δ
 CONTACT : COPPER ALLOY.
 CONTACT FINISH : GOLD OVER NICKEL.
 SHELL : STEEL.
 BOARDLOCK : BRASS, TIN PLATED.
 RIVETED INSERT : BRASS, NICKEL PLATED.

SPECIFICATION:

CURRENT RATING : 5 AMP
 DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC FOR 1 MINUTE.
 INSULATION RESISTANCE : 1000M Ω MIN. AT 500V DC.
 CONTACT RESISTANCE : 15m Ω MAX.
 OPERATING TEMPERATURE : -55°C ~ +105°C.

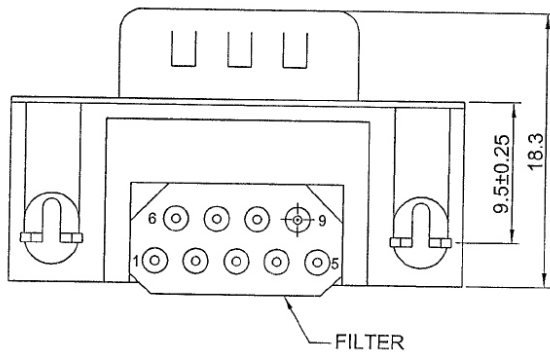

POSITION	A \pm 0.20	B \pm 0.20	C \pm 0.38	D
09 PIN	16.90	25.00	30.80	11.08
15 PIN	25.25	33.30	39.20	19.39
25 PIN	38.95	47.05	53.05	33.24
37 PIN	55.40	63.50	69.40	49.86


RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE

X. \pm
 .X \pm
 .XX \pm
 .XXX \pm
 ANG \pm



ORDER INFORMATION

DRF-PGN-xx-LF
 SERIES | | | LEADFREE
 | | | 09~37WAY
 | | | NUT
 | | | FULL GOLD
 | | | MALE

煜倫股份有限公司

www.morethanall.com

SIZE A4 PROJECTION

DESCRIPTION: