
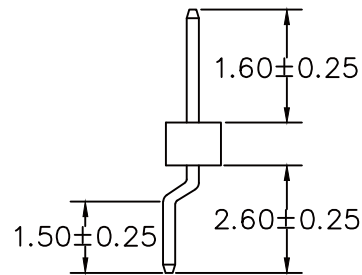


MATERIAL
 HOUSING : THERMOPLASTIC UL94V-0
 CONTACT : COPPER ALLOYS

SPECIFICATION
 CURRENT: 1A
 OPERATING TEMPERATURE: -40°C TO +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN
 WITHSTANDING VOLTAGE : AC 500V RMS

RECOMMENDED P.C.B LAYOUT

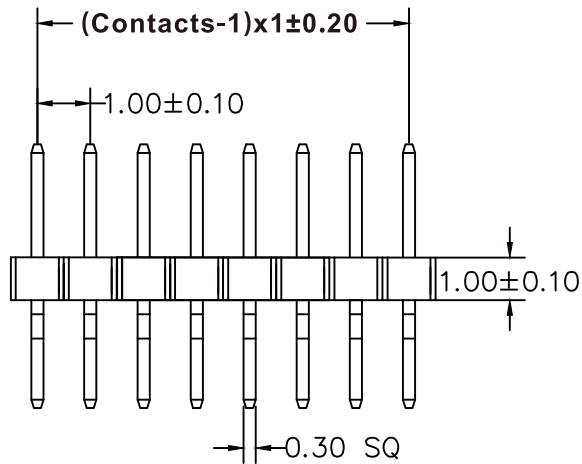

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
 .X±
 .XX±
 .XXX±
 ANG±



ORDER INFORMATION

H10-WX16-1Xxx-LF
 SERIES LEADFREE
 1X02:02 WAY
 1X50:50 WAY
 CONTACT 1.6mm
 NON POST
 90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: