


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 SHELL: COPPER ALLOY, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATING

SPECIFICATION

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -20°C~+105°C

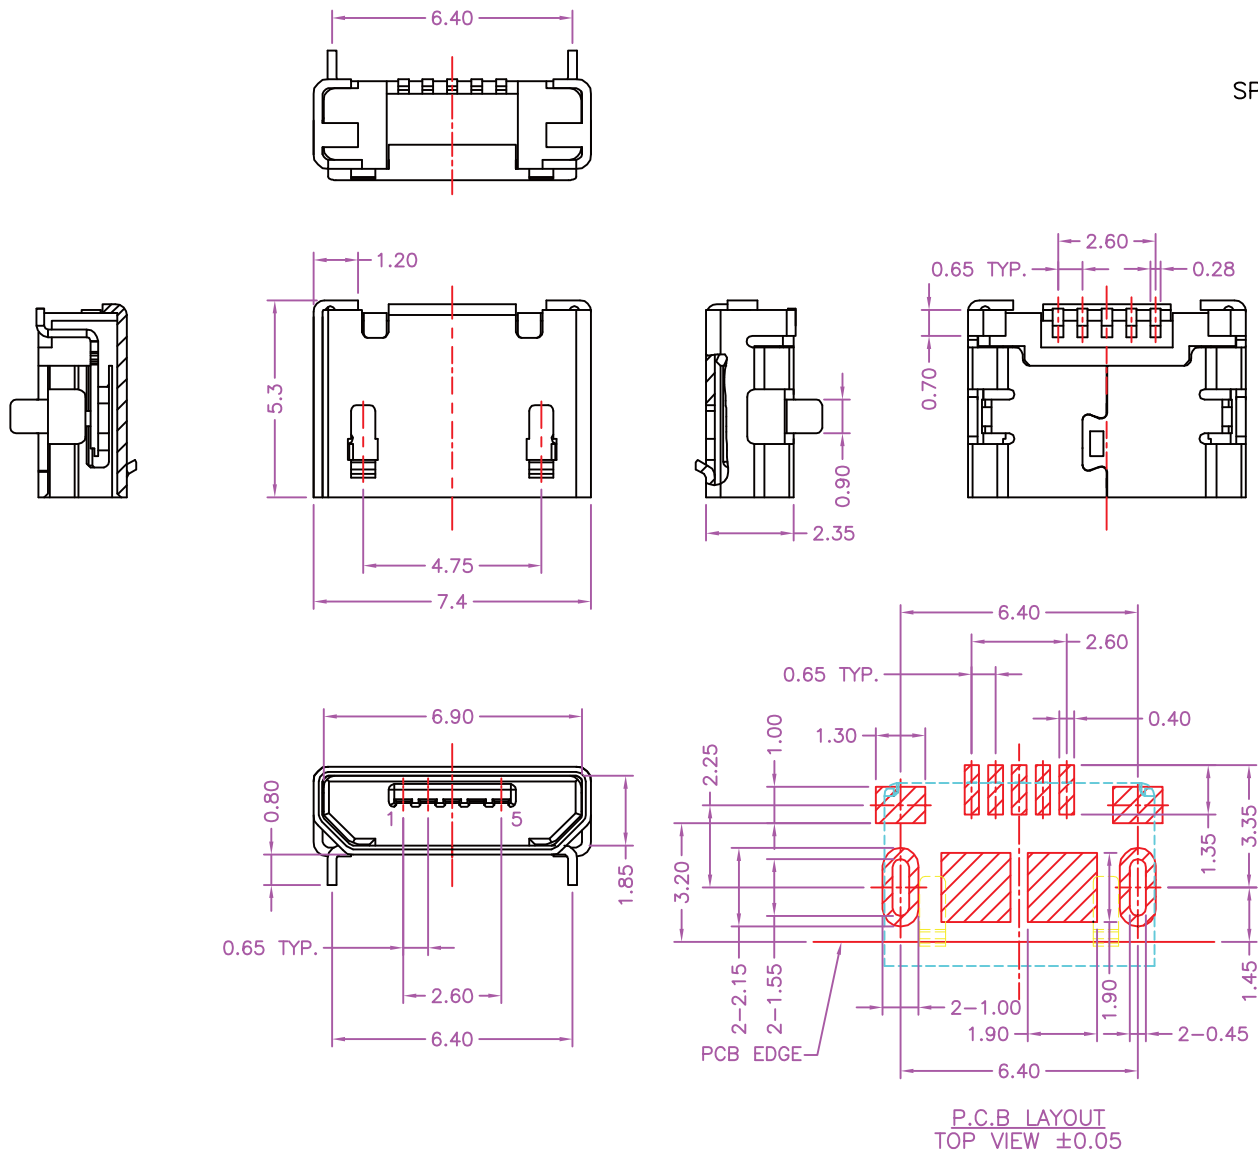

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE

TOLERANCES ARE
 X. ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ± 5°

SIZE A4 PPROJECTION



ORDER INFORMATION

MISB-SWME-5B-LF
 SERIES | | | | LEADFREE
 | | | | 5 PIN B TYPE
 | | | | EAR
 | | | | METAL FOOT
 | | | | 90°SMT
 | | | | FEMALE

DESCRIPTION: MICRO USB B TYPE, PCB MOUNT, SMT, METAL SHIELD FEMALE