


Material: *Insulator: Nylon 6T UL 94V-0 (Milky Yellow)
 *Contact Post: 0.20mm^t, Phosphor Bronze, Matte Tin Plated.
 *Solder Tab: 0.20mm^t, Brass, Matte Tin Plated.
 Note: RoHS II and Halogen Free Compliance

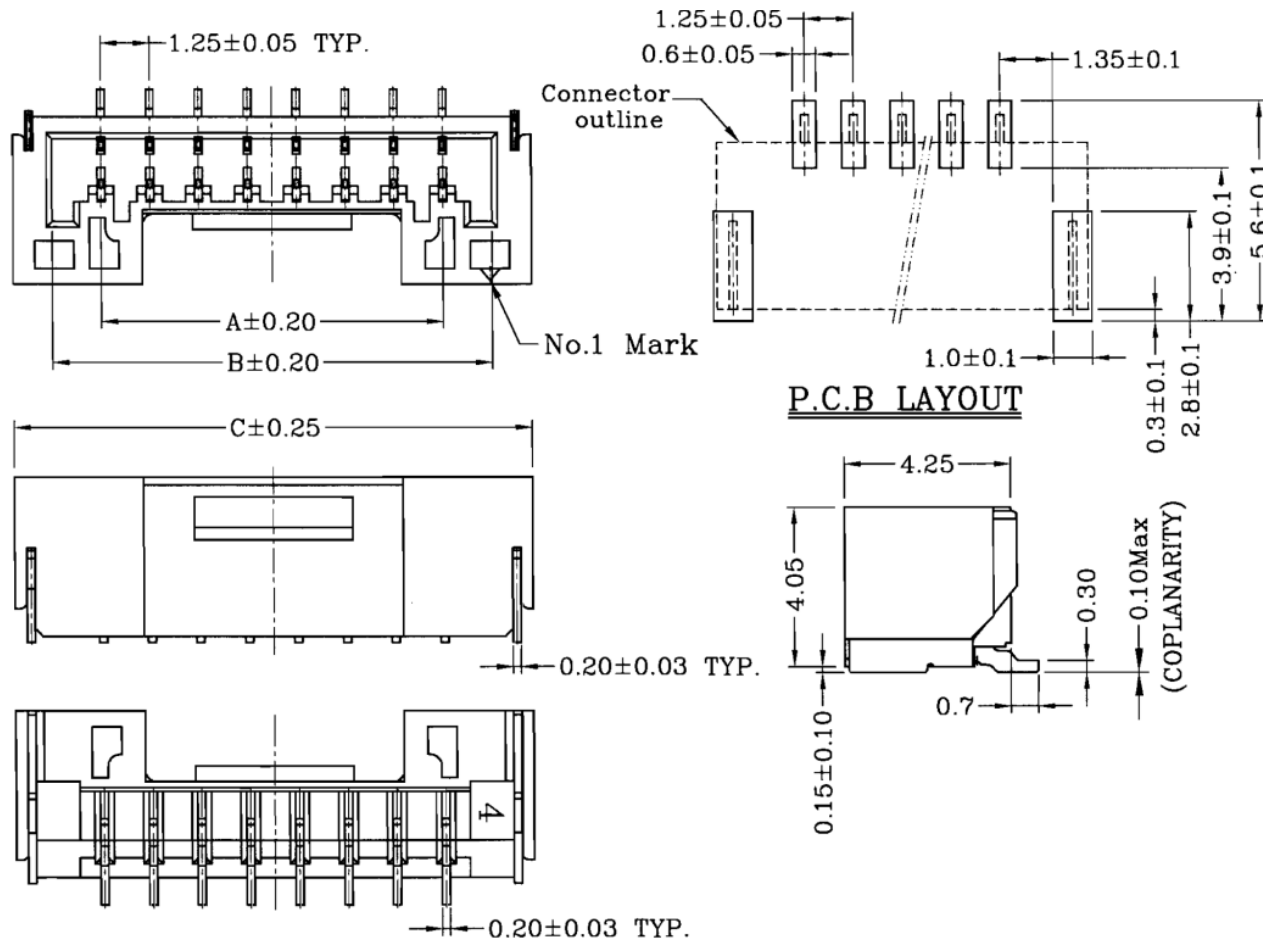

Dimensional & Ordering Information:

Circuits	Part No.	Dimensions			Qty/Reel
		A	B	C	
2	GH-VC-02	—	3.75	5.75	1000
3	GH-VC-03	2.50	5.00	7.00	1000
4	GH-VC-04	3.75	6.25	8.25	1000
5	GH-VC-05	5.00	7.50	9.50	1000
6	GH-VC-06	6.25	8.75	10.75	1000
7	GH-VC-07	7.50	10.00	12.00	1000
8	GH-VC-08	8.75	11.25	13.25	1000
9	GH-VC-09	10.00	12.50	14.50	1000
10	GH-VC-10	11.25	13.75	15.75	1000
11	GH-VC-11	12.50	15.00	17.00	1000
12	GH-VC-12	13.75	16.25	18.25	1000
13	GH-VC-13	15.00	17.50	19.50	1000
14	GH-VC-14	16.25	18.75	20.75	1000
15	GH-VC-15	17.50	20.00	22.00	1000

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PJECTION


X, ±
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.08
 ANG ±



ORDER INFORMATION

GH-VC-xx-LF
 SERIES | LEADFREE
 | 02~15WAY
 | CAP
 | 180°SMT

DESCRIPTION:

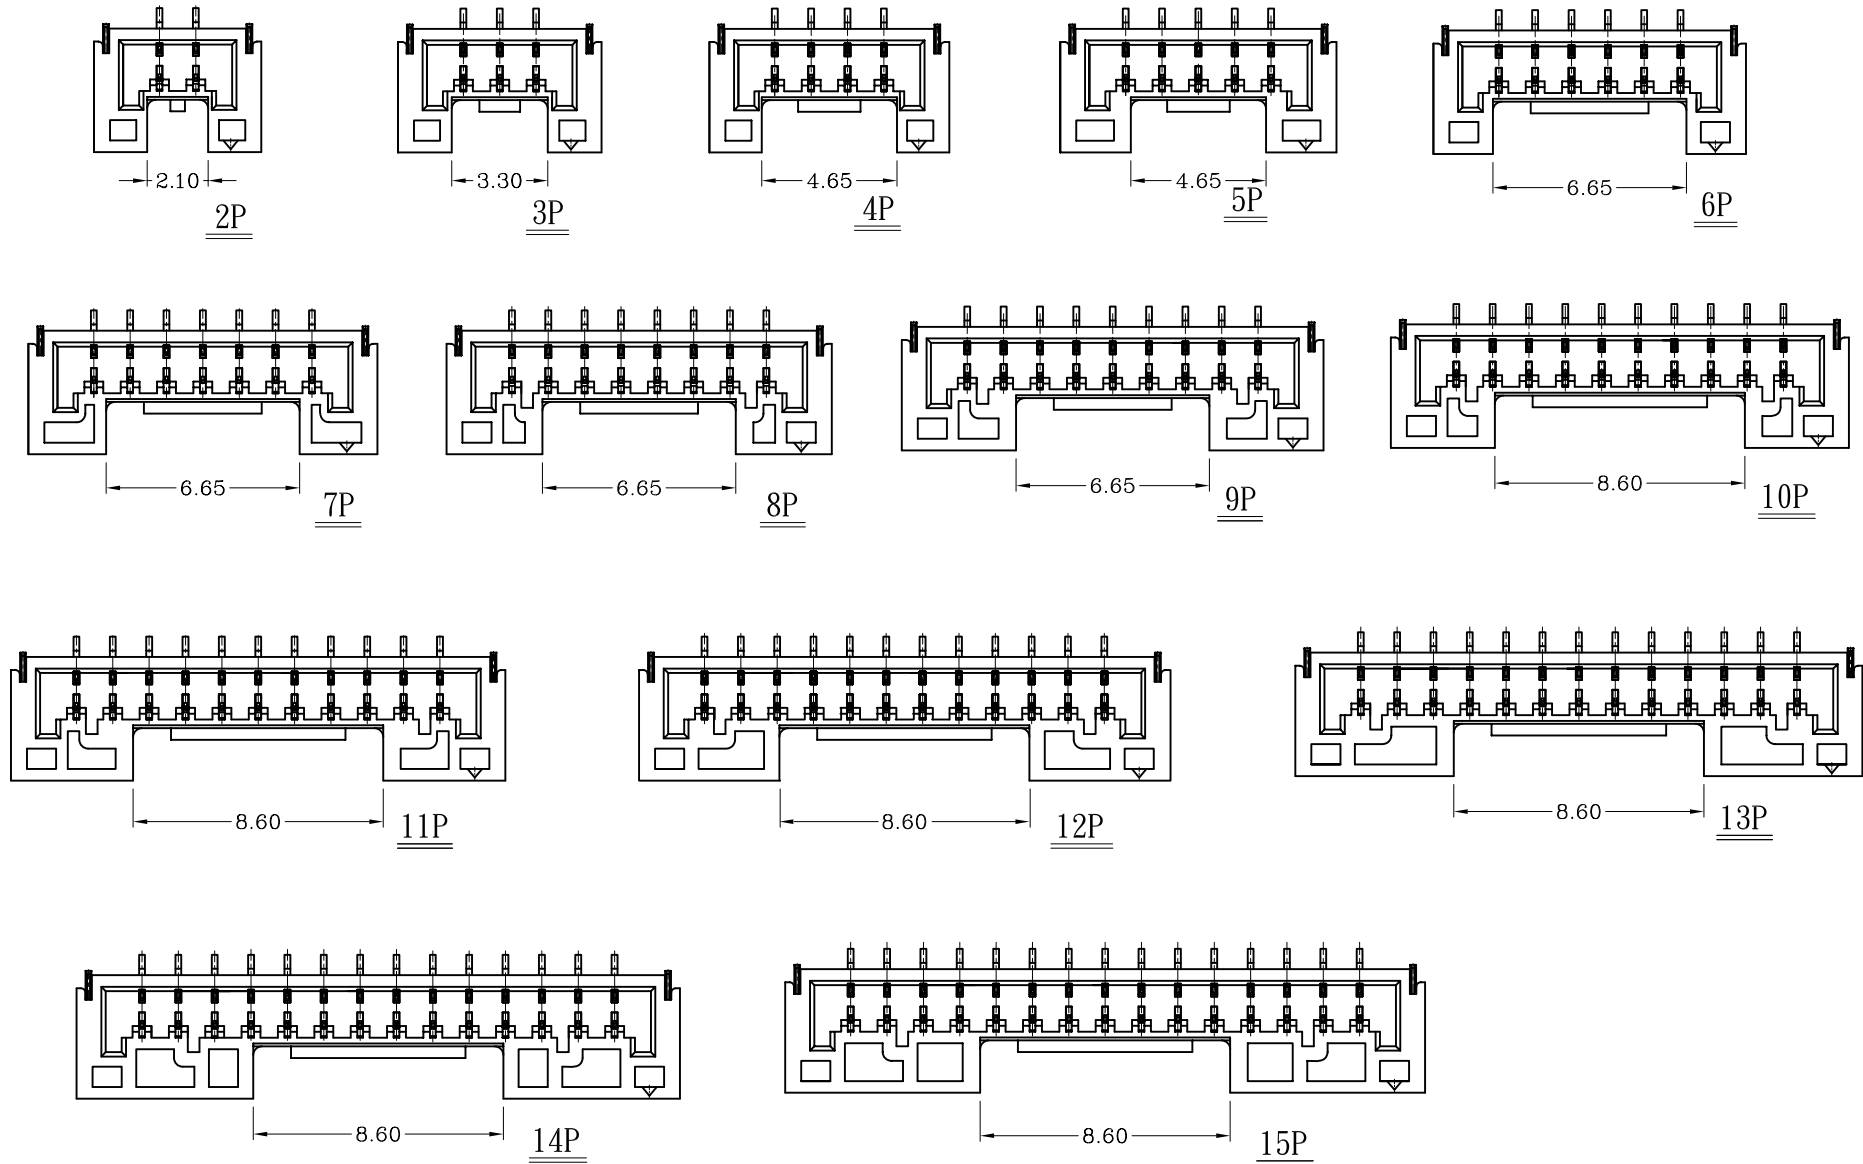

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ±



ORDER INFORMATION

GH-VC-xx-LF
SERIES | LEADFREE
| 02~15WAY
CAP
180°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: