


Features:

- 2 ~ 4 circuits available
- Plastic: UL 94V-2 nylon 66
- Pin: Tin-plated phosphor bronze, 0.25mm thickness

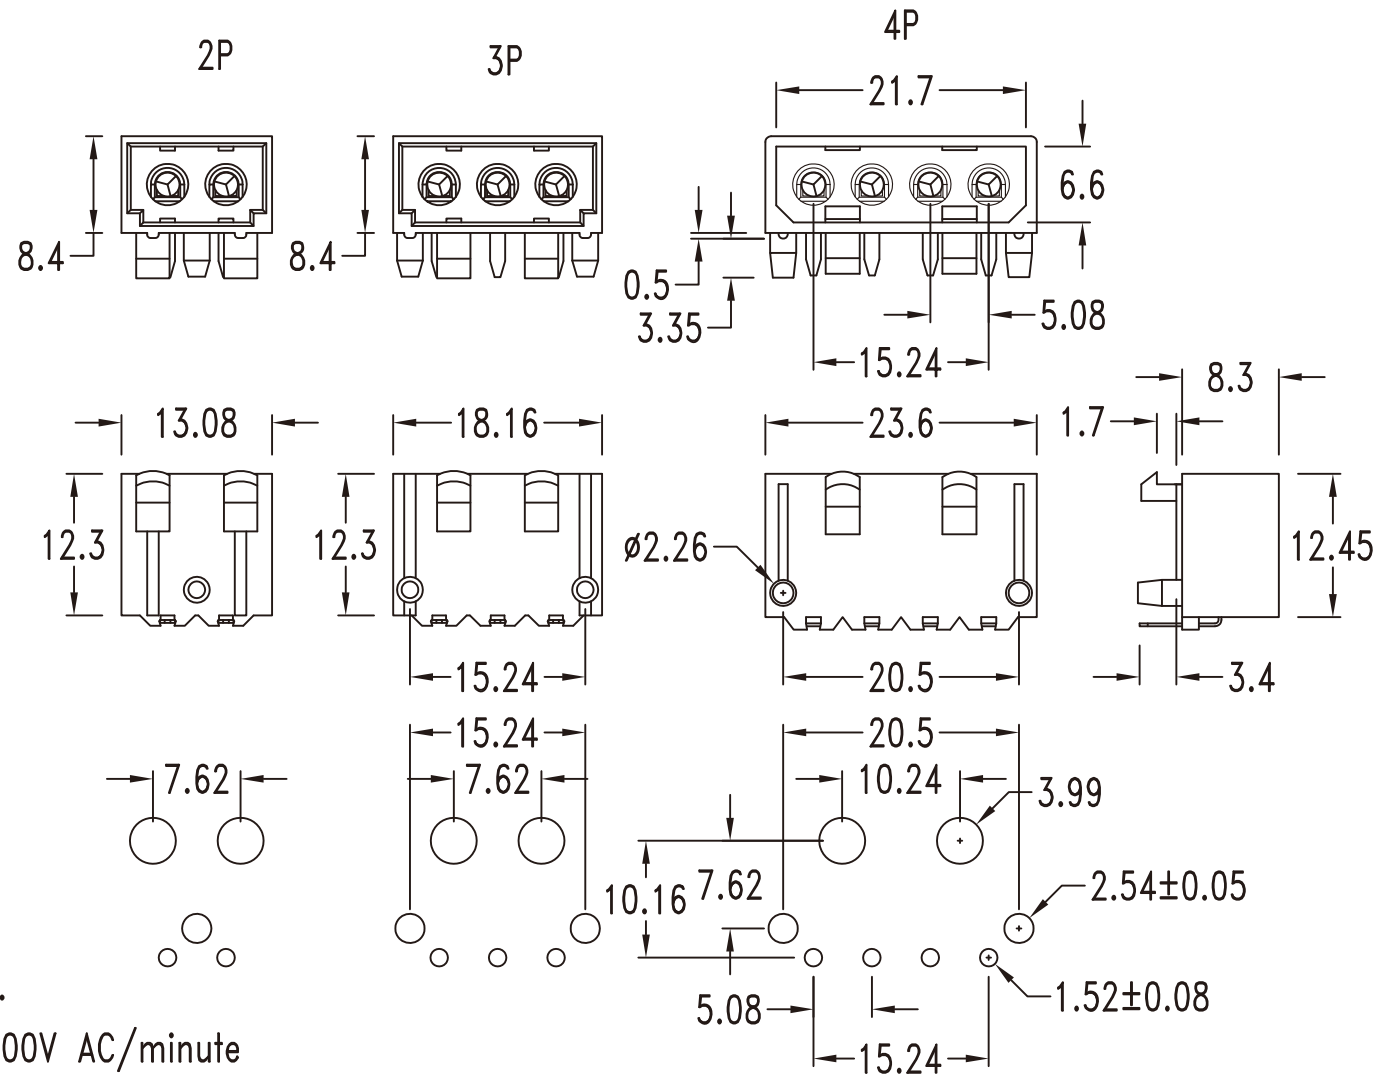

Specification:

- Current rating: 10 A
- Voltage rating: 250V AC
- Contact resistance: 10m Ω Max.
- Insulation resistance: 500M Ω Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

P. C. board hole dimensions

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

X, \pm
.X \pm 0.40
.XX \pm 0.25
.XXX \pm 0.08
ANG \pm

P PROJECTION



ORDER INFORMATION

DP-PR-xx-LF
SERIES LEADFREE
02.03.04WAY
DIP 90°
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: (5.08mm) Right Angle Header