
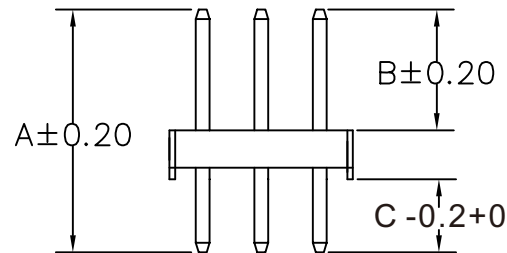


MATERIAL
 HOUSING : THERMOPLASTIC UL94V-0
 CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 3A
 OPERATING TEMPERATURE: -55°C TO +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN
 WITHSTANDING VOLTAGE: AC 1000V RMS

RECOMMENDED P.C.B LAYOUT



A: 7.00 mm B: 2.70 mm C: 1.80 mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ± 3°



ORDER INFORMATION

H-D070027018-3X01-LF
 SERIES | | | | LEADFREE
 | | | | 03WAY
 | | | | DIP 1.8mm
 | | | | CONTACT 2.7mm
 | | | | TOTAL 7.0mm
 | | | | DIP180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: