
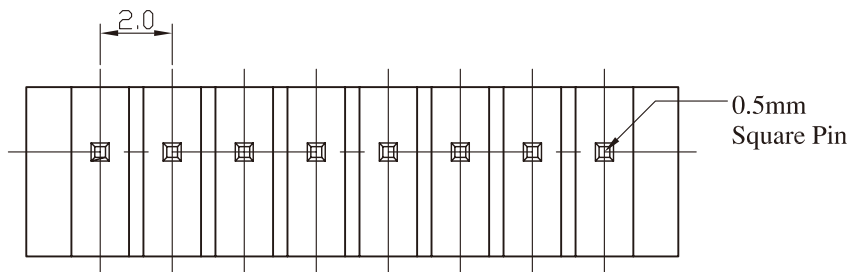
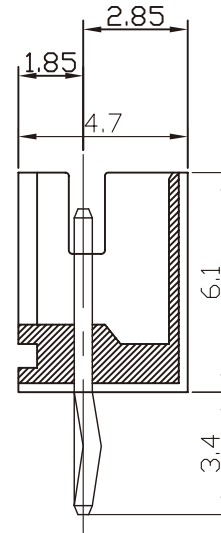


RECOMMENDED P.C. BOARD HOLE DIMM.

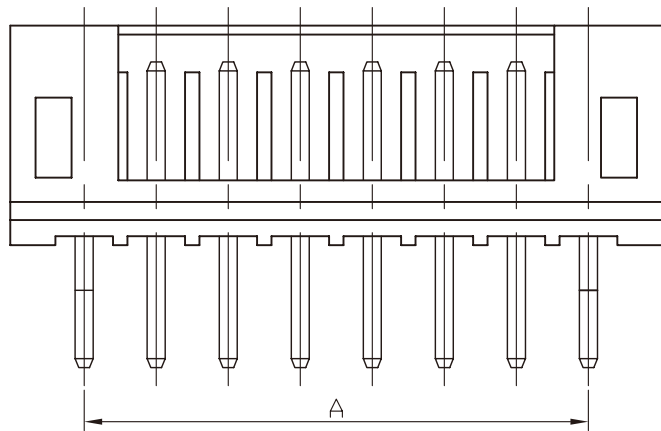

Specifications

Electrical

Voltage Rating: 100V(AC)
 Current Rating: 2A
 Contact Resistance: 20m Ω max.
 Dielectric Withstandeing Voltage: 800V AC/1min.
 Insulation Resistance: 1000m Ω min.

Material

Circuits: 2~16
 Insulator: Nylon 66 UL 94V-0
 Color: White or Natural
 Contact: Brass 0.50mm(0.20") Square Pin
 Plating: Tin
 Temperature Range: -25° C~+85° C
 Applicable PC Board Thickness: 0.8 to 1.6mm

Poles	Dimension mm (in.)		Part No.	Note.
	A	B		
2	2.0(0.079)	6.1(0.240)	PH-D-02	
3	4.0(0.157)	8.1(0.318)	PH-D-03	
4	6.0(0.236)	10.1(0.397)	PH-D-04	
5	8.0(0.315)	12.1(0.476)	PH-D-05	
6	10.0(0.394)	14.1(0.555)	PH-D-06	
7	12.0(0.472)	16.1(0.634)	PH-D-07	
8	14.0(0.551)	18.1(0.713)	PH-D-08	
9	16.0(0.630)	20.1(0.791)	PH-D-09	
10	18.0(0.709)	22.1(0.870)	PH-D-10	
11	20.0(0.787)	24.1(0.949)	PH-D-11	
12	22.0(0.886)	26.1(1.028)	PH-D-12	
13	24.0(0.945)	28.1(1.106)	PH-D-13	
14	26.0(1.024)	30.1(1.185)	PH-D-14	
15	28.0(1.102)	32.1(1.263)	PH-D-15	
16	30.0(1.181)	34.1(1.343)	PH-D-16	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE

SIZE A4

PJECTION

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ± 1°



ORDER INFORMATION

PH-D-xx-LF
 SERIES | LEADFREE
 02~16WAY
 DIP 180°

DESCRIPTION: 2.0mm Wire-to-Board Header DIP 180° Type