
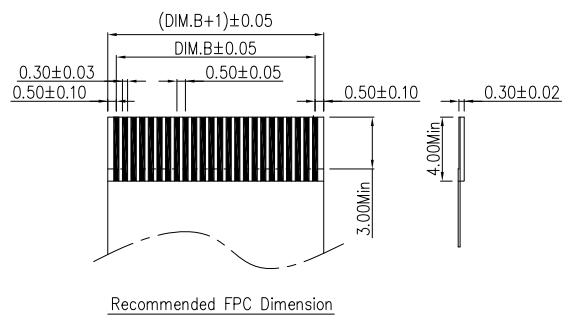
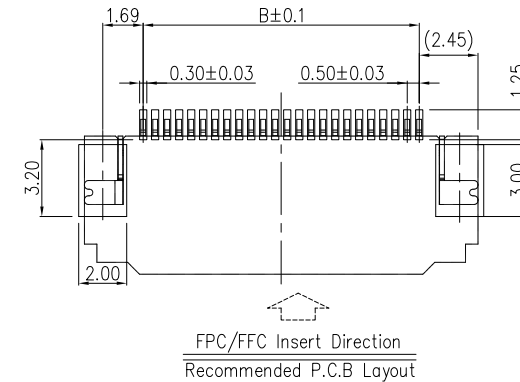

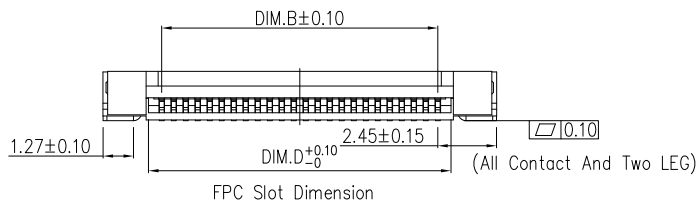
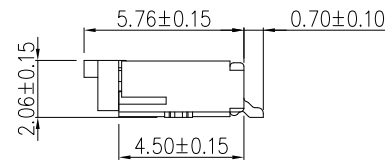


SPEC :

1. Housing: High-Temp Plastic, UL94-V
Color: Nature (Ivory) (LCP)
2. Locker: High-Temp Plastic, UL94-V
Color: Black (LCP)
3. Contact: Phosphor Bronze (C5191)
Initial: 30m Ohms Max.
Voltage Rating: 50V AC, DC
4. Solder Tab: BRASS (C2680)
5. Temperature Rating: -25°C ~ +85°C
6. Dielectric Withstanding Voltage: 500V AC/Min

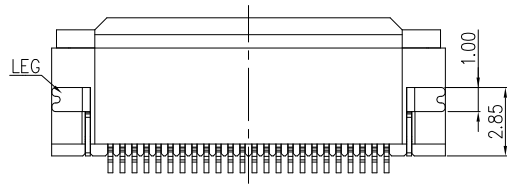

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

CHECKED BY GENIUS


UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION



ORDER INFORMATION

FPV-WHB20-xx-LF
SERIES | | | LEADFREE
| | | 04~80WAY
| | | HIGH 2.0mm
| | | BOTTOM CONTACT
| | | HINGED ZIF
| | | 90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 0.5PH 2.0H 掀蓋臥貼前插

No. of contacts	Dimensions				No. of contacts	Dimensions				No. of contacts	Dimensions				No. of contacts	Dimensions			
	A	B	C	D		A	B	C	D		A	B	C	D		A	B	C	D
4	6.40	1.50	6.00	2.50	24	16.40	11.50	16.00	12.50	43	25.90	21.00	25.50	22.00	62	35.40	30.50	35.00	31.50
5	6.90	2.00	6.50	3.00	25	16.90	12.00	16.50	13.00	44	26.40	21.50	26.00	22.50	63	35.90	31.00	35.50	32.00
6	7.40	2.50	7.00	3.50	26	17.40	12.50	17.00	13.50	45	26.90	22.00	26.50	23.00	64	36.40	31.50	36.00	32.50
7	7.90	3.00	7.50	4.00	27	17.90	13.00	17.50	14.00	46	27.40	22.50	27.00	23.50	65	36.90	32.00	36.50	33.00
8	8.40	3.50	8.00	4.50	28	18.40	13.50	18.00	14.50	47	27.90	23.00	27.50	24.00	66	37.40	32.50	37.00	33.50
9	8.90	4.00	8.50	5.00	29	18.90	14.00	18.50	15.00	48	28.40	23.50	28.00	24.50	67	37.90	33.00	37.50	34.00
10	9.40	4.50	9.00	5.50	30	19.40	14.50	19.00	15.50	49	28.90	24.00	28.50	25.00	68	38.40	33.50	38.00	34.50
11	9.90	5.00	9.50	6.00	31	19.90	15.00	19.50	16.00	50	29.40	24.50	29.00	25.50	69	38.90	34.00	38.50	35.00
12	10.40	5.50	10.00	6.50	32	20.40	15.50	20.00	16.50	51	29.90	25.00	29.50	26.00	70	39.40	34.50	39.00	35.50
13	10.90	6.00	10.50	7.00	33	20.90	16.00	20.50	17.00	52	30.40	25.50	30.00	26.50	71	39.90	35.00	39.50	36.00
14	11.40	6.50	11.00	7.50	34	21.40	16.50	21.00	17.50	53	30.90	26.00	30.50	27.00	72	40.40	35.50	40.00	36.50
15	11.90	7.00	11.50	8.00	35	21.90	17.00	21.50	18.00	54	31.40	26.50	31.00	27.50	73	40.90	36.00	40.50	37.00
16	12.40	7.50	12.00	8.50	36	22.40	17.50	22.00	18.50	55	31.90	27.00	31.50	28.00	74	41.40	36.50	41.00	37.50
17	12.90	8.00	12.50	9.00	37	22.90	18.00	22.50	19.00	56	32.40	27.50	32.00	28.50	75	41.90	37.00	41.50	38.00
18	13.40	8.50	13.00	9.50	38	23.40	18.50	23.00	19.50	57	32.90	28.00	32.50	29.00	76	42.40	37.50	42.00	38.50
19	13.90	9.00	13.50	10.00	39	23.90	19.00	23.50	20.00	58	33.40	28.50	33.00	29.50	77	42.90	38.00	42.50	39.00
20	14.40	9.50	14.00	10.50	40	24.40	19.50	24.00	20.50	59	33.90	29.00	33.50	30.00	78	43.40	38.50	43.00	39.50
21	14.90	10.00	14.50	11.00	41	24.90	20.00	24.50	21.00	60	34.40	29.50	34.00	30.50	79	43.90	39.00	43.50	40.00
22	15.40	10.50	15.00	11.50	42	25.40	20.50	25.00	21.50	61	34.90	30.00	34.50	31.00	80	44.40	39.50	44.00	40.50
23	15.90	11.00	15.50	12.00															

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION 

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±



ORDER INFORMATION

FPV-WHB20-xx-LF
SERIES | | | LEADFREE
04~80WAY
HIGH 2.0mm
BOTTOM CONTACT
HINGED ZIF
90°SMT

DESCRIPTION: 0.5PH 2.0H 掀蓋臥貼前插