

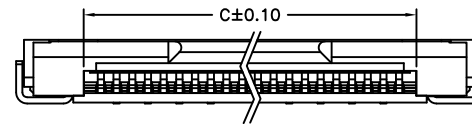

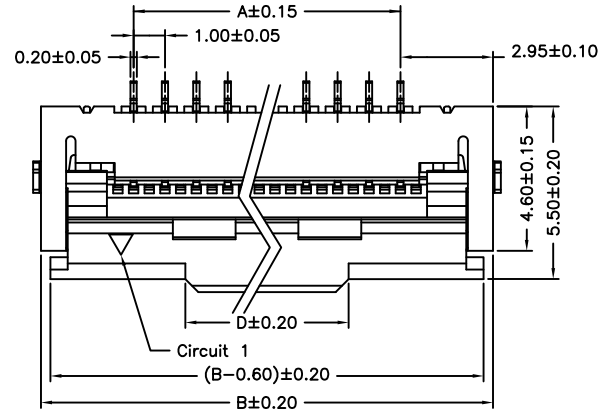
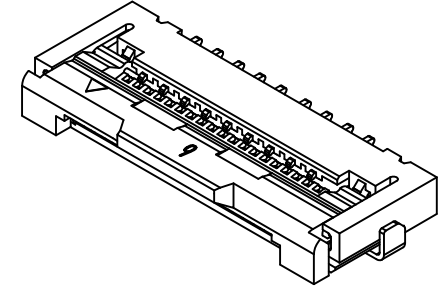
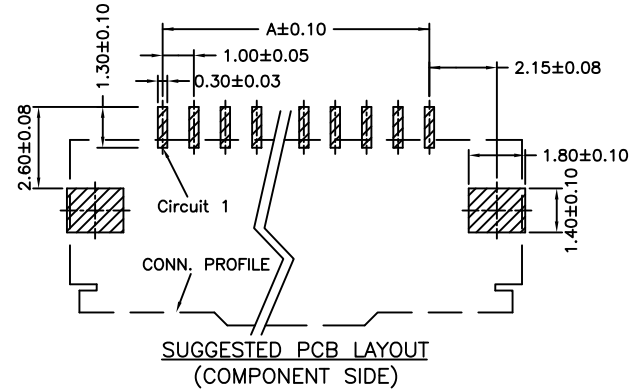
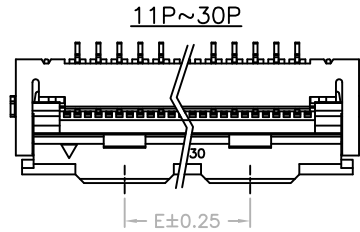


FPC/FFC Connector 1.0mm Press C Type H=2.0mm

SPECIFICATIONS

Current Rating: 0.5A AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 250V AC/minute
 Contacts: Phosphor Bronze/Tin-plated
 Solder Tabs: Phosphor Bronze/Tin-plated
 Housing: Nylon 6T,UL94V-0,Natural(Beige)
 Cover: Nylon 6T,UL94V-0,Natural(Black)



Ordering Information & Dimensions

PART NO.	Dimensions				
	A	B	C	D	E
FPA-WHB20-05	4.00	9.90	6.10	4.70	
FPA-WHB20-06	5.00	10.90	7.10	4.70	
FPA-WHB20-07	6.00	11.90	8.10	5.20	
FPA-WHB20-16	15.00	20.90	17.10	5.20	8.50
FPA-WHB20-22	21.00	26.90	23.10	5.20	14.50
FPA-WHB20-25	24.00	29.90	26.10	5.20	6.50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
 X, ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

FPA-WHB20-xx-LF
 SERIES | LEADFREE
 90°SMT | 05-25WAY
 HIGH 2.0mm
 BOTTOM CONTACT
 HINGED ZIF

DESCRIPTION: FPC/FFC Connector 1.0mm Press C Type H=2.0mm

煜倫股份有限公司

www.morethanall.com