


PCB LAYOUT

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 TERMINAL: COPPER ALLOY,
 PLATING: CONTACT AREA GOLD PLATED
 SOLDER AREA TIN PLATED

SPECIFICATION

CURRENT RATING: 1 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 50m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

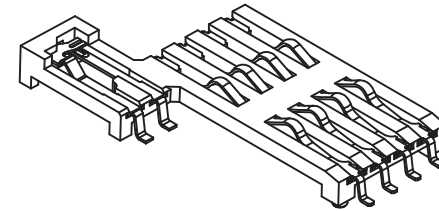

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±


.X ±

.XX ±

.XXX ±

ANG ±

P PROJECTION



ORDER INFORMATION

SCY-W24xxPB-08-LF

SERIES | OPEN SWITCH | LEADFREE
 POST | 08WAY

90°SMT H" DIM
 PAD TO PAD 24.6mm 14:1.4mm 35:3.5mm
 30:3.0mm 42:4.2mm 47:4.7mm

DESCRIPTION: