

Mating Height Draw.

Specifications:

Current Rating:1.0A AC/DC

Voltage Rating:30V AC/DC

Contact Resistance:20m ohm. Max.

Insulation Resistance:1000M ohm. Min.

Withstanding Voltage:AC 500V AC/minute





Operating Temperature Range:-40°C ~ +105°C

Material and Finish

Insulator:High Temp. Plastic (UL94V-0)

Contact material:Phosphor Bronze

Finish:Tin Plated

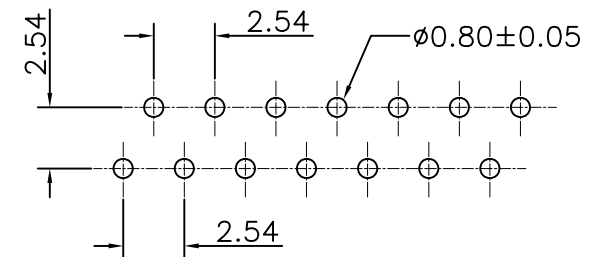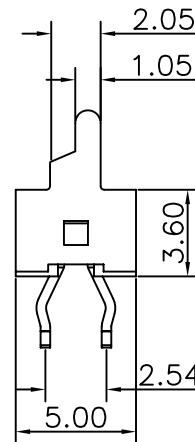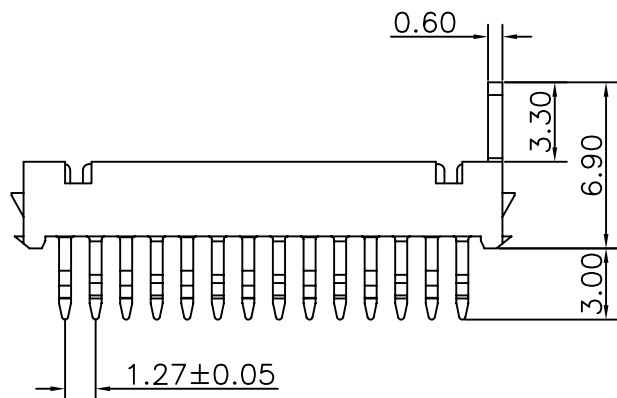

PCB Layout

Circuits	Dimension		Circuits	Dimension		Circuits	Dimension	
	A	B		A	B		A	B
4	7.20	2.54	12	17.36	12.70	20	27.52	22.86
6	9.74	5.08	14	19.90	15.24	22	30.06	25.40
8	12.28	7.62	16	22.44	17.78	24	32.60	27.94
10	14.82	10.16	18	24.98	20.32	26	35.14	30.48

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PJECTION

X.±  
.X±0.20  
.XX±0.10  
.XXX±  
ANG±



ORDER INFORMATION

MIM-BD-xx-LF  
SERIES | LEADFREE  
04-26WAY  
DIP 180°  
BOX

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 2.54mm PCB Connector A Male Type