


WIRING DIAGRAM

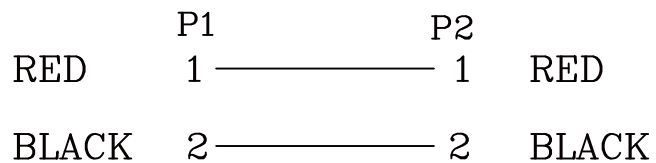

PACKAGE:

3	TERMINAL	4	PCS	PV-T-22
2	HOUSING	2	PCS	PV-H-02
1	CABLE2	1	SET	UL 1007 24AWG 640*4*4mm #RED UL 1007 24AWG 640*4*4mm #BLACK
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X.±
.X±
.XX±
.XXX±
ANG±

PPOJECTION



ORDER INFORMATION

PVX2-020224TW1-F60C-LF

SERIES

24AWG

600mm

LEADFREE

2 PIN TO 2 PIN

TWISTED WIRE

FEMALE TO FEMALE

DESCRIPTION: 2.54 DP-2P/2P L:600mm