



FUSE HOLDER FOR 5.2x20 mm FUSE

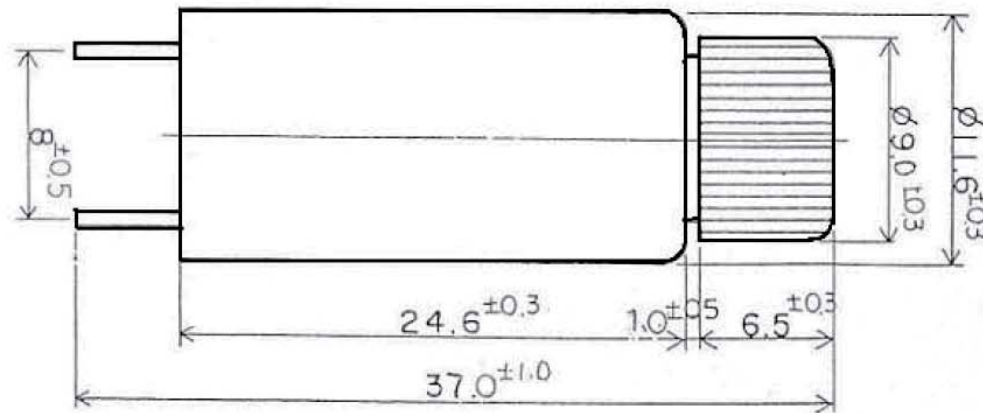

Specification :

- A > Rated Current : 10A 250V
- B > Insulation Resistance At 500V DC : 100MΩ MIN.
- C > Contact Resistance : 5mΩ At 1A DC
- D > Dielectric Strength For 60 Second : AC 1000V MIN.
- E > Bayonet Knob
- F > Approvals : UR

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

FSH-U08-5X20-LF
SERIES | LEADFREE
5X20mm
FOOT DISTANCE 8.0mm
UPRIGHT

DESCRIPTION: