




**FEATURES:**

- . 2-25 Circuits
- . Housing, UL 94V-2 Nylon 6/6, Natural
- . Designed for parallel and perpendicular board stacking, connection
- . Mates with .045"[1.14mm] square pins

**SPECIFICATIONS:**

- . Current rating: 7A AC. DC
- . Voltage rating: 250V AC. Maximum
- . Temperature range: -40°C ~ +105°C
- . Contact resistance: Initial Value/10mΩ max.  
After environmental testing /20mΩ max.
- . Insulation resistance: 5000 MΩ min
- . Withstand Voltage: 1500V AC/minute
- . Applicable PC board thickness: .063"[1.6mm]

PIN數	DIM.A	DIM.B	PIN數	DIM.A	DIM.B
02	7.82	3.96	14	55.34	51.48
03	11.78	7.92	15	59.30	55.44
04	15.74	11.88	16	63.26	59.40
05	19.70	15.84	17	67.22	63.36
06	23.66	19.80	18	71.18	67.32
07	27.62	23.76	19	75.14	71.28
08	31.58	27.72	20	79.10	75.24
09	35.54	31.68	21	83.06	79.20
10	39.50	35.64	22	87.02	83.16
11	43.46	39.60	23	90.98	87.12
12	47.42	43.56	24	94.94	91.08
13	51.38	47.52	25	98.90	95.04

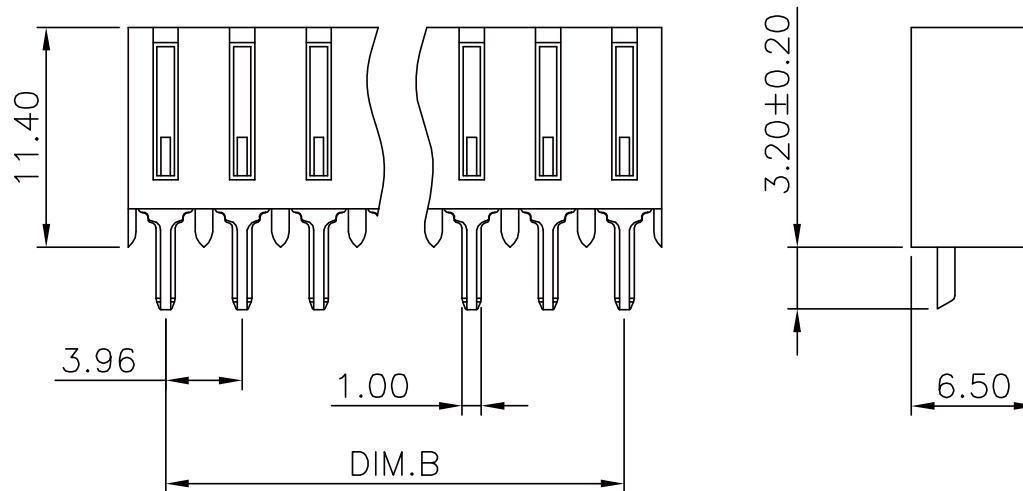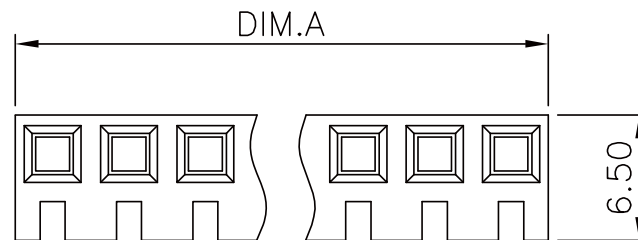

**RoHS Compliant**

TOLERANCES ARE

X. ±  
.X ± 0.20  
.XX ± 0.10  
.XXX ± 0.05  
ANG ± 1°

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PJECTION

**ORDER INFORMATION**

KX-TX-xx-LF  
SERIES | LEADFREE  
02-25WAY  
NON LOCK  
TOP ENTRY

DESCRIPTION:

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com