
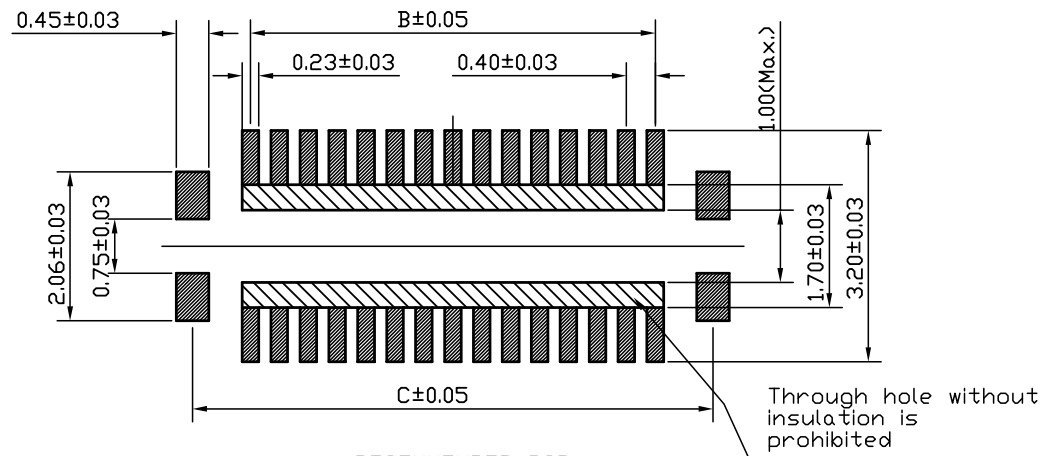
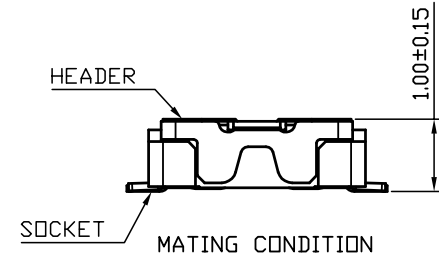



- NOTES:
 1. MATERIAL:
 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0(LCP); COLOR:BLACK.
 1.2 CONTACT: PHOSPHOR BRONZE(C5191)
 1.3 FITTING NAIL:PHOSPHOR BRONZE(C5191)
 2. FINISH:
 CONTACT:SEE ORDER INFORMATION.
 UNDERPLATING: 50~100u" NICKEL OVERALL.
 3. REFLOW SOLDER CAPABLE TO 260°C

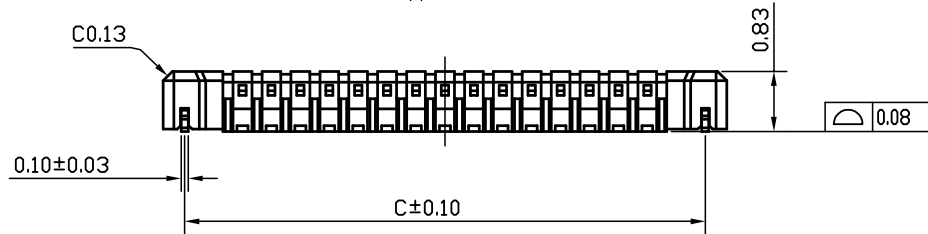

RECOMMENDED PCB PATTERN

DIM	A	B	C
20Pin	5.80	3.60	5.20
24Pin	6.60	4.40	6.00
30Pin	7.80	5.60	7.20
40Pin	9.80	7.60	9.20

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X ± 0.50


.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG ± 2°

PJECTION



ORDER INFORMATION

NP0418-P01X-xxx-LF

SERIES

LEADFREE

020-040WAY

NON POST

UNMATED HIGH 0.1mm

MALE

DESCRIPTION: 0.4mm 1.0H BOARD TO FPC CONN ,HEADER