

NOTES

1.MATERIAL

- 1.1 Insulator: P.B.T. +15% G.F. UL-94V-0
- 1.2 Contact: Phosphor Bronze
- 1.3 Plating: Gold Or Nickel Plated

2.SPECIFICATION

- 2.1 Current Rating: 3Amp
- 2.2 Dielectric Withstanding: AC 1000V min.Per minute
- 2.3 Insulation Resistance: 1000M ohms At DC 500V
- 2.4 Contact Resistance: 25 M ohms Max
- 2.5 Contact Insertion Force: 1kg max
- 2.6 Contact Separation force: 70g min
- 2.7 Operating Temperature: -55°C To +85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1

DATE


SIZE A4

PJECTION

X.±
.X.±
.XX.±
.XXX.±
ANG.±



ORDER INFORMATION

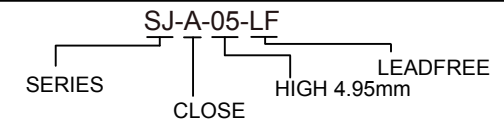

DESCRIPTION: MJ 2A黑 磷銅半面金