

- Material and Finish:
1. Insulator Material: L.C.P.+30% Glass Fiber, UI94v-0, Color: Black
 2. CAM Housing Material: Nylon-9T+30% Glass Fiber, UI94-0, Color: Black
 3. Contact Material: Phosphor Bronze, C5191R-EH, t=0.15mm
 4. Switch Terminal Material: Phosphor Bronze, C5191R-EH, t=0.15mm
 5. Contact Area Plated: 15u" Gold Plated Over 50u" Nickel
 6. Solder Area Plated: 100u" Tin Plated Over 50u" Nickel
 7. Switch Terminal Contact Area Plated: 2u" Gold Plated Over 50u" Nickel
 8. Switch Terminal Solder Area Plated: 100u" Tin Plated Over 50u" Nickel
 9. Wire Spring: SUS304-WPB, Nickel Plated
 10. Shell Material: Stainless Steel suli 301, t=0.2mm
 11. Shell Solder Area Plated: 2u" Selective Gold Plated For One Side
 12. CAM Pin: SUS304-WPB, Nickel Plated
 13. Current Rating: 0.5A AC/DC Max
 14. Contact Resistance: 30 mohm Max
 15. Insulation Resistance: 500 Mohm Min
 16. Dielectric Withstanding Voltage: 250V AC/DC
 17. Insertion cycles: 5000 Cycles Min
 18. Operation Temperature: -40°C to +85°C
 19. Card Detection Switch (NORMAL OPEN)

RoHS Compliant


TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com



DRAWING BY CY		X, ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	P PROJECTION	



ORDER INFORMATION

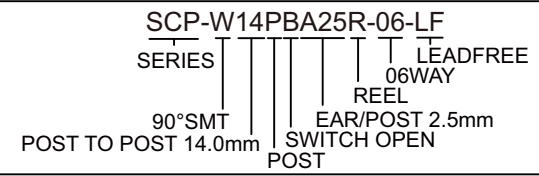

DESCRIPTION:

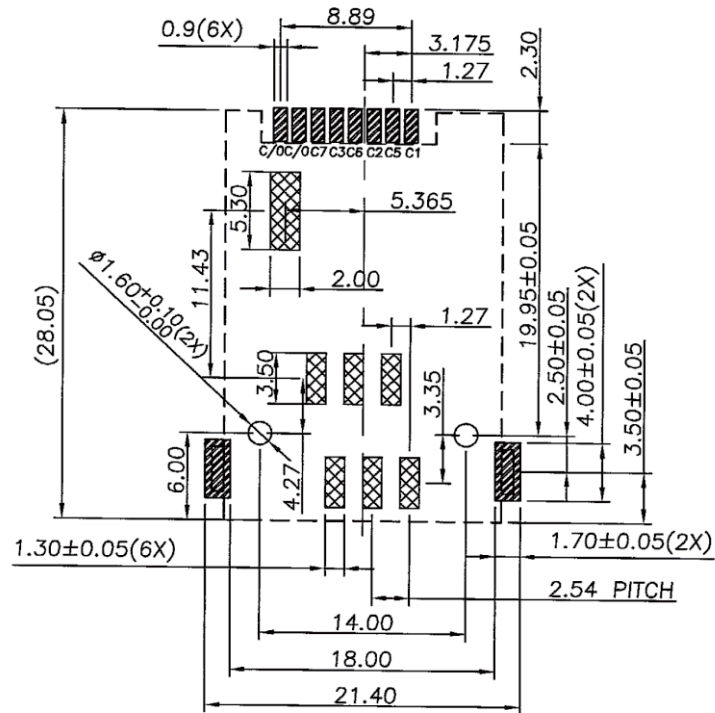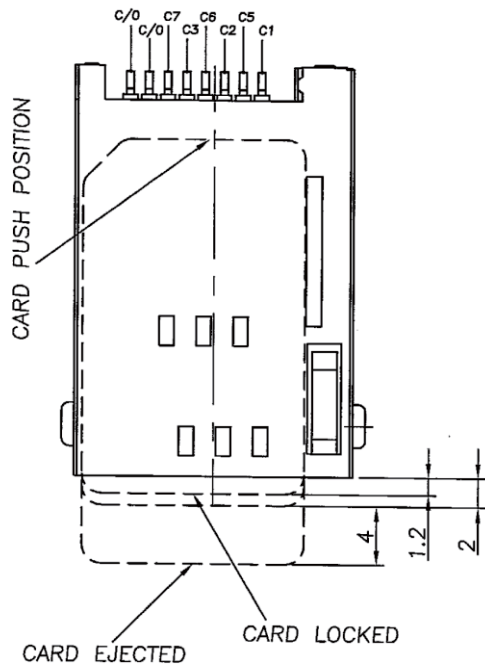

RECOMMENDED PCB LAYOUT

- Trace prohibition area
- Solder area
- Component outline

PIN NO	PIN ASSIGNMENT	PIN NO	PIN ASSIGNMENT
C1	VCC	C5	GND
C2	RST	C6	Not used for class A RFU for classes B and C
C3	CLK	C7	I/O

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION


SCP-W14PBA25R-06-LF

SERIES | | | | LEADFREE
06WAY
REEL
90°SMT | | | | EAR/POST 2.5mm
POST TO POST 14.0mm | | | | SWITCH OPEN
POST


DESCRIPTION:

材料	名稱	型號(mm)	顏色	數量
1	外紙箱(k=k)	350*350*350	土黃	1個
2	內紙箱	335*335*52	土黃	6個
3	PE袋	480*500*0.1mm	透明	6個
4	Reel包裝帶	15000*44	黑色	700個
5	Cover Tape	22000*37.5	透明	—
6	包裝盤	∅330*50	藍色	6個
包裝數量	700pcs/盤*6盤*1箱=4200pcs/箱 備註: 1盤裝一個內箱。			

包裝示意圖

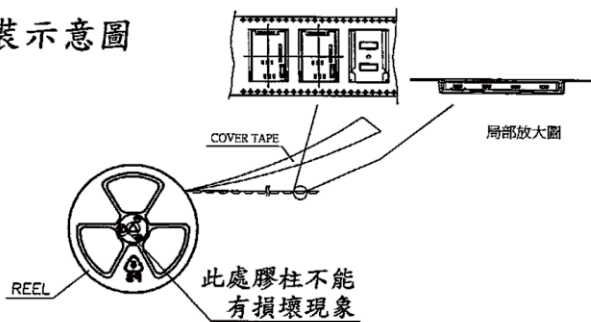

包裝如圖:

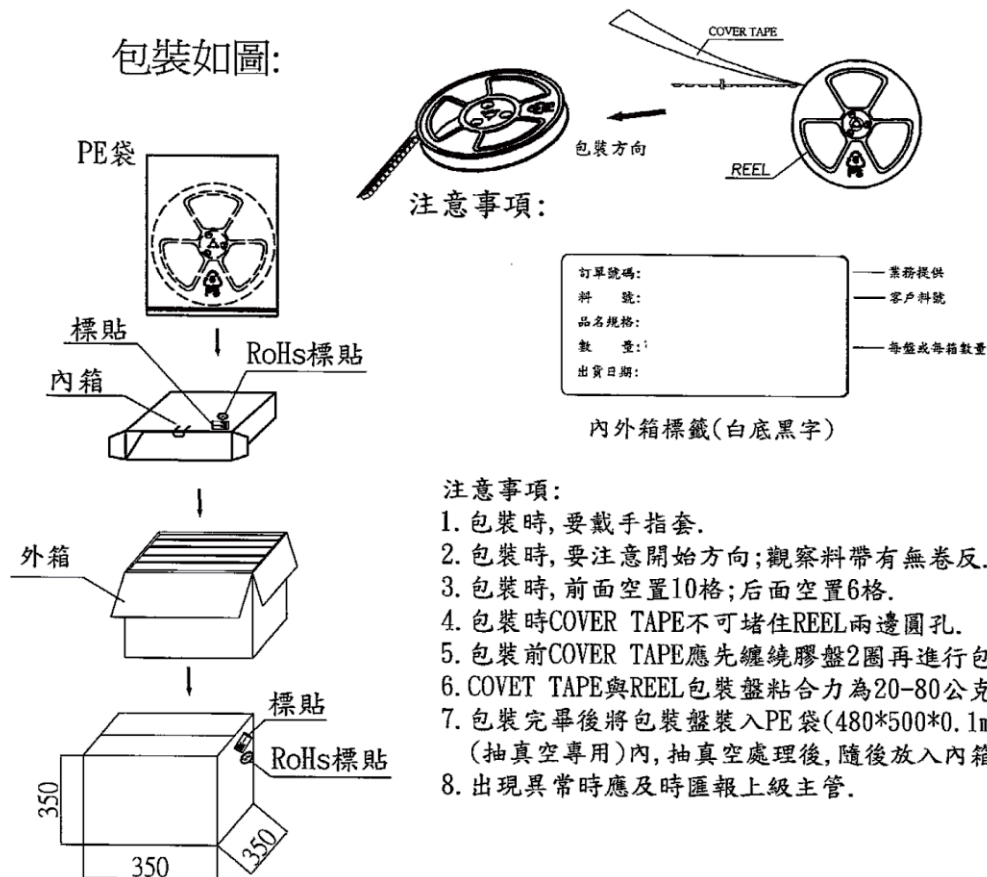

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

SCP-W14PBA25R-06-LF

SERIES LEADFREE

06WAY REEL

90°SMT EAR/POST 2.5mm

POST TO POST 14.0mm SWITCH OPEN

POST

DESCRIPTION: