
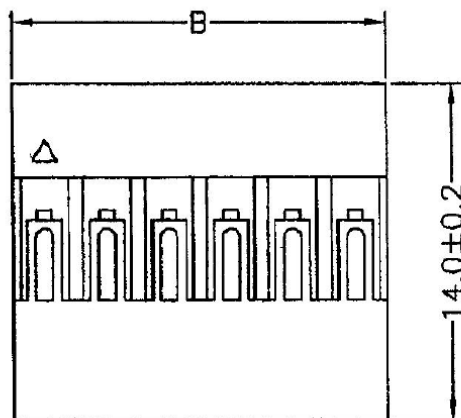


NOTES

- * Poles:1-40
- * Material:NORYL UL94V-1 BLACK


Specifications

- * Current rating: 3A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 800V AC/minute

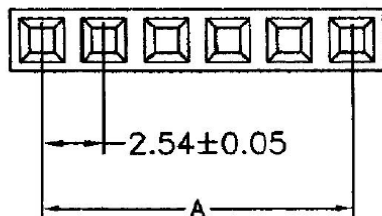

A&B DIM. TOLERANCE

- 2P~10P±0.20
- 11P~20P±0.25
- 21P~30P±0.35
- 31P~40P±0.45

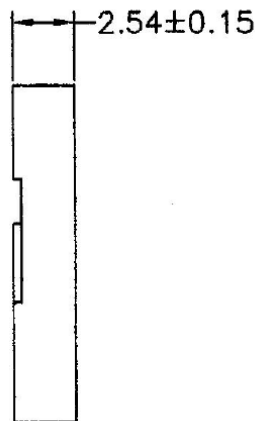

| CIRCUITS | DIM. A | DIM. B |
|----------|--------|--------|
| 1 | | 2.65 |
| 2 | 2.54 | 5.28 |
| 3 | 5.08 | 7.82 |
| 4 | 7.62 | 10.36 |
| 5 | 10.16 | 12.90 |
| 6 | 12.70 | 15.44 |
| 7 | 15.24 | 17.98 |
| 8 | 17.78 | 20.52 |
| 9 | 20.32 | 23.06 |
| 10 | 22.86 | 25.60 |
| 11 | 25.40 | 28.14 |
| 12 | 27.94 | 30.68 |
| 13 | 30.48 | 33.22 |
| 14 | 33.02 | 35.76 |
| 15 | 35.56 | 38.30 |
| 16 | 38.10 | 40.84 |
| 17 | 40.64 | 43.38 |
| 18 | 43.18 | 45.92 |
| 19 | 45.72 | 48.46 |
| 20 | 48.26 | 51.00 |
| 21 | 50.80 | 53.54 |
| 22 | 53.34 | 56.08 |
| 23 | 55.88 | 58.62 |
| 24 | 58.42 | 61.16 |
| 25 | 60.96 | 63.70 |
| 26 | 63.50 | 66.24 |
| 27 | 66.04 | 68.78 |
| 28 | 68.58 | 71.32 |
| 29 | 71.12 | 73.86 |
| 30 | 73.66 | 76.40 |
| 31 | 76.20 | 78.94 |
| 32 | 78.74 | 81.48 |
| 33 | 81.28 | 84.02 |
| 34 | 83.82 | 86.56 |
| 35 | 86.36 | 89.10 |
| 36 | 88.90 | 91.64 |
| 37 | 91.44 | 94.18 |
| 38 | 93.98 | 96.72 |
| 39 | 96.52 | 99.26 |
| 40 | 99.06 | 101.80 |

RoHS Compliant



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1

DATE

SIZE A4


TOLERANCES ARE

- X. ±
- .X ±
- .XX ±
- .XXX ±
- ANG ±

P PROJECTION



ORDER INFORMATION



DESCRIPTION: .100"(2.54mm)CONNECTOR HOUSING