

**Material:**

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Cover: Thermoplastic Polyester Glass Filled UL94V-0.

**Electrical Characteristics:**

Current Rating: 2 AMP.


Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C~+125°C .

**\*RoHS Compliant**

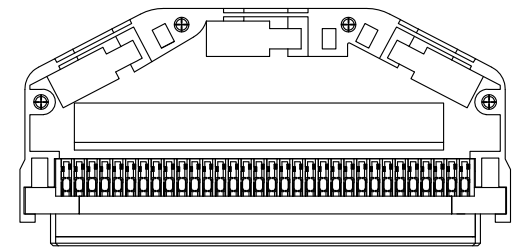

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ±


ANG ±

煜倫股份有限公司


www.morethanall.com

SIZE A4

PPOJECTION



**ORDER INFORMATION**

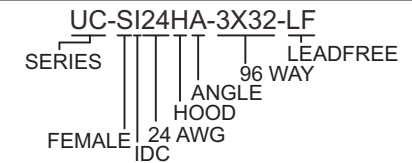

DESCRIPTION: 2.54mm Female Cable Conn.IDC Type