

PCB LAYOUT(T=1.00mm)
COMPONENT SIDE

Pin No.	Signal Name
1	VBUS
2	D-
3	D+
4	ID
5	GND
6	MicB_SSTX-
7	MicB_SSTX+
8	GND_DRAIN
9	MicB_SSRX-
10	MicB_SSRX+

NOTES:

*Material

Housing: LCP+50%GF, UL 94V-0 rated, Color: Black;
 Contact: Phosphor Bronze;
 Plating: Au Plating on contact area, Au(Flash) Plating on solder tail, Ni(50u" Min) underplating over all;
 Shell: Stainless steel; Nickel(40u" Min) Plating.

*Mechanical




Insertion Force: 35N Max;
 Withdrawal Force: 8N Min;
 Durability: 10000 cycles Min.

*Electrical Specification

Current Rating: 1.8A(Only Pin1,5), 0.25A For Other Pin;
 Contact Resistance: 30mΩ Max;
 Insulation Resistance: 100MΩ Min;
 Dielectric Withstanding Voltage: 100V AC Min.

*Environmental

Operating Temperature: -55°C to +85°C.



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.20
 ANG ±

PPOJECTION




ORDER INFORMATION

MISB-SVPMEG30CR-10B-HF
 SERIES | FEMALE | 180°SMT | POST | REEL | CAP | GOLD 30u" | METAL EAR | HALOGEN FREE | 10 PIN B TYPE

DESCRIPTION: Micro USB 3.0 Vertical B Type Receptacle(6.0)

煜倫股份有限公司

www.morethanall.com

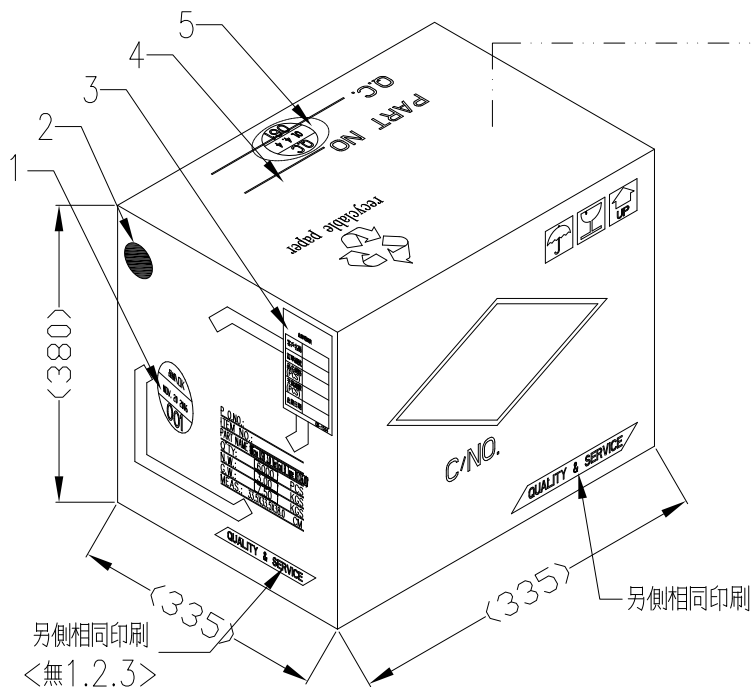

包裝材質及規格:

類型	材質	規格(Unit:mm)	數量
外箱	A=A	335*335*380	1PCS
隔板	AIA	332*332*3	2PCS
旋轉膠盤	PC	φ330*φ100	10PCS
承載膠帶	PS(透明)	32(W)*7680(L)*0.50(T)	10PCS
壓敏膠帶	PET	25.5(W)*7680(L)*0.05(T)	76.9m/箱
PE袋	PE	600(開口)*900*0.05	1PCS

* 加蓋印記位置

1. 品管注介章(檢驗合格章)
2. 月份標記
3. 出貨明細表
4. 該產品料號
5. 生產制造日期, 檢驗員代號




注意: 紙箱尺寸為內空間尺寸。

注: 1. 成品組裝完成並QC完之後, 將其裝入透明承載帶內, 同時用壓敏膠帶冷封。

2. 檢查REEL包裝卷帶是否有鬆動, 如有鬆動, 需重新貼緊。
3. 全檢OK後, 將Reel盤裝入PE袋, FQC復檢。
4. 若包裝易吸濕產品在PE袋內加放1包干燥劑, 外箱貼易吸濕標籤。
5. 每一REEL卷盤上都要貼上料號及蓋印本廠D/C和數量, 若有特殊要求請貼上客戶料號等。

標簽貼在橢圓孔的一邊。每一REEL卷盤上都要在標籤上蓋印D/C, 特別注明:

- ①. 產品上有噴D/C, 則不需蓋印本廠D/C。
- ②. 客戶標籤上含蓋有D/C的, 不需蓋印本廠D/C。
6. 產品放入REEL出貨時, 卷入端與拉出端各空20pcs不放產品。

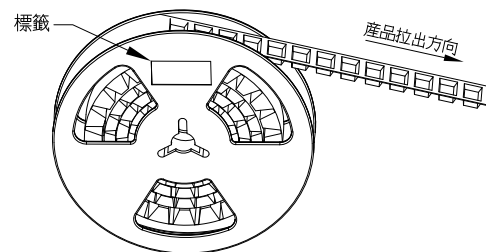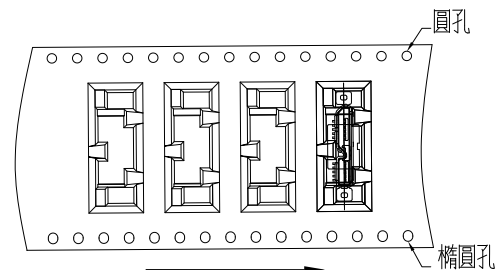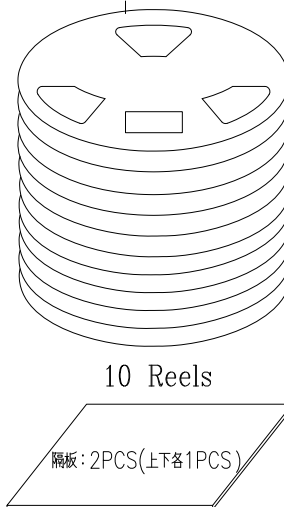

出貨明細表	
客戶名稱	
訂單編號	
品名規格	
交貨總數 (PCS)	
單箱數量 (PCS)	
出貨日期	

QR-1504

*PACKING

600 PCS/REEL

10 REELS/CARTON (共6000PCS)

*PACKING DETAILS

P/O.NO.:

ITEM NO.:

PART NAME: Micro USB 3.0 Vertical B Type REC(6.0)

Q'TY: 6000 PCS

N.W.: 3.00 KGS

G.W.: 7.50 KGS

MEAS.: 33.5X33.5X38.0 CM

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.20
ANG ±



ORDER INFORMATION

MISB-SVPMEG30CR-10B-HF
SERIES | | | | | | | | | | HALOGEN FREE
FEMALE | | | | | | | | | | REEL
180°SMT | | | | | | | | | | CAP
POST | | | | | | | | | | METAL EAR
GOLD 30u"

DESCRIPTION: Micro USB 3.0 Vertical B Type Receptacle(6.0)