



包装方式: 单PCS八字理线包装. 50PCS/袋.
贴上标签 (型号/年/月)

ELECTRONIC TEST:

1. 100% TEST, (Open, Short, Miss Wire).
2. Contact Resistance: 2Ω /max.
3. Insulation Resistance: $20M\Omega$ /min.
4. Hi-Pot: 300v dc/10ms.
5. 符合环保

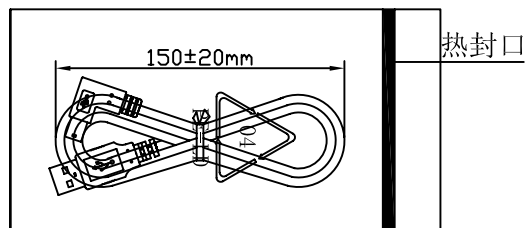

PIN OUT



PART LIST: 本产品均符合“ROHS”规范环保标准. 用的材料均为相当品。

4	PVC: 45P BLACK.	KG/K
3	MINI USB BM: GOLD FLASH CONNECTOR, NICKEL PLATED SHELL, PLASTIC: BLACK	1 SET
2	USB AM: GOLD FLASH CONNECTOR, NICKEL PLATED SHELL, PLASTIC: WHITE	1 SET
1	CABLE: UL2725 28AWG*1P+28AWG*2C+AB OD: 3.5MM JACK BLACK L=1830MM	1 PCS
ITEM	STANDARD SPECIFICATION	Q' TY UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

MBUB-5BRL4A28-M6F-LF

SERIES

LEADFREE
1830mm
MALE TO MALE
28 AWG

5 PIN 90° B TYPE LEFT TO 4 PIN A TYPE

DESCRIPTION: USB AM TO USB MINI5P侧弯 CABLE BLACK L=1830MM