



2x15P, 2x20P, 2x25P無此凸點

**Material:**

- \* Insulator: Nylon 6T UL 94V-0 (Milky Yellow)
- \* Contact Post: 0.20mm<sup>t</sup>, Phosphor Bronze, Gold Plated.
- \* Solder Tab: 0.20mm<sup>t</sup> Brass, Matte Tin Plated.

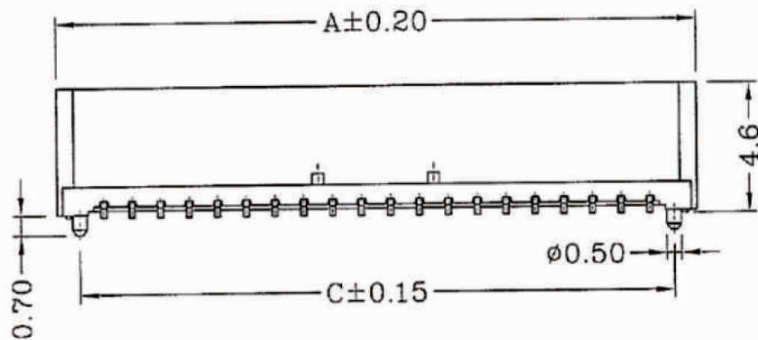

**Dimensional & Ordering Information:**

Circuits	Dimensions				Qty/Reel
	A	B	C	D	
10	7.30	4.00	5.70	5.40	1000
12	8.30	5.00	6.70	6.40	1000
16	10.30	7.00	8.70	8.40	1000
20	12.30	9.00	10.70	10.40	1000
30	17.30	14.00	15.70	15.40	1000
40	22.30	19.00	20.70	20.40	1000
50	27.30	24.00	25.70	25.40	1000

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY  
CHECKED BY GENIUS  
UNIT/mm SCALE 1:1  
DATE

X.±  
.X±  
.XX±  
.XXX±  
ANG±

**煜倫股份有限公司**


www.morethanall.com

SIZE A4

PROJECTION





**ORDER INFORMATION**


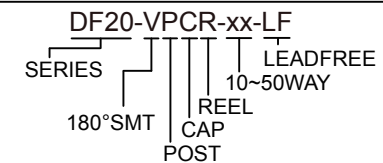


DESCRIPTION:



# TAPING SPECIFICATIONS

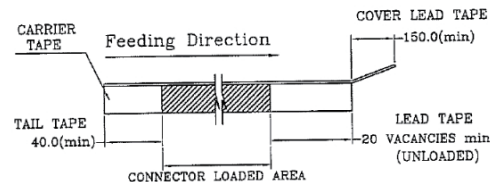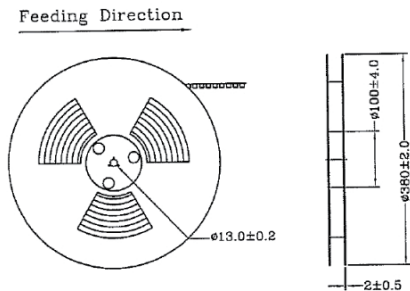

10 to 20 Circuits

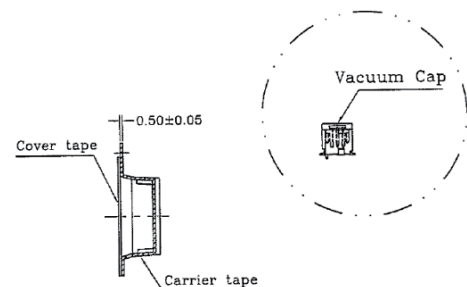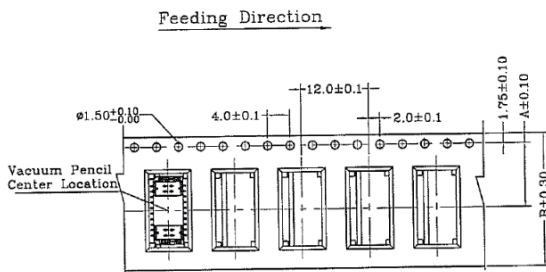

30 to 50 Circuits

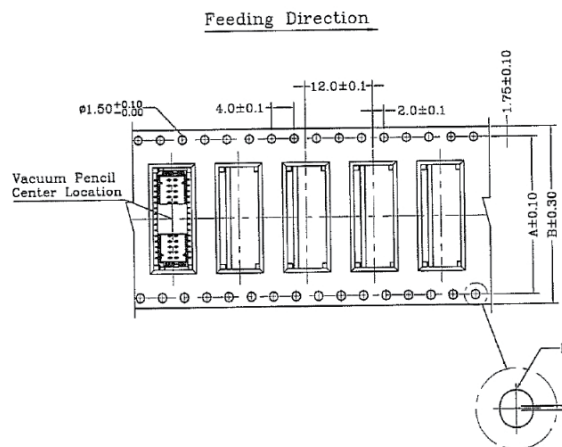

Circuits	Dimensions		Qty/Reel
	A	B	
10	7.50	16.00	1000
12	7.50	16.00	1000
16	11.50	24.00	1000
20	11.50	24.00	1000
30	28.40	32.00	1000
40	40.40	44.00	1000
50	40.40	44.00	1000

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE


SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION



**ORDER INFORMATION**

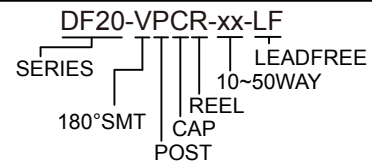

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com