


P. C. B. Layout

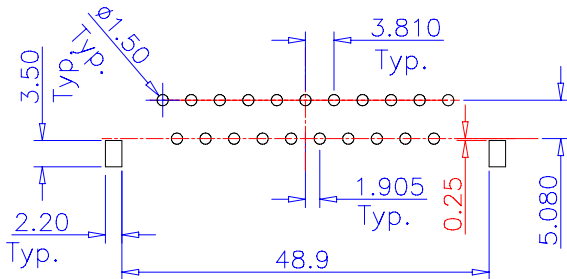

MATERIALS
 INSULATOR:PC
 CONTACT:Brass.

ENVIRONMENTAL
 OPERATING TEMPERATURE:-55°C 105°C

ELECTRICAL
 CONTACT WITHSTANDING:1AMP
 DIELECTRIC WITHSTANDING:AC1000V/min.R.M.S.
 INSULATION RESISTANCE:1000MΩmin.at 500V DC.
 CONTACT RESISTANCE:50mΩmax.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES


DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

煜倫股份有限公司

www.morethanall.com

SIZE A4 PPROJECTION



ORDER INFORMATION

SC-SRL-21-LF
 SERIES | LOCK | LEADFREE
 21 WAY
 DIP 90°
 FEMALE

DESCRIPTION: