

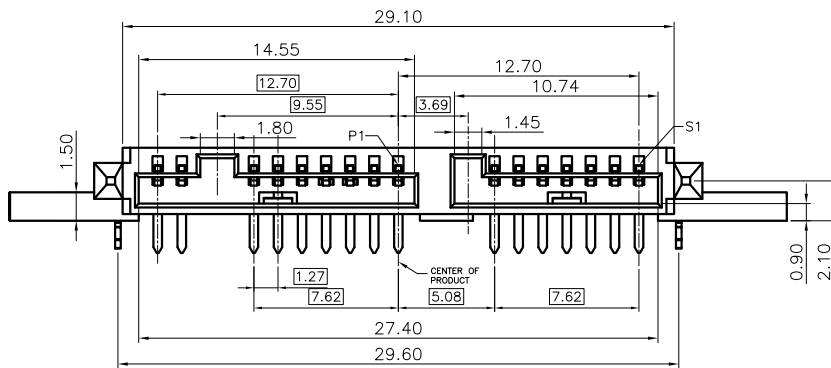


SECTION A-A

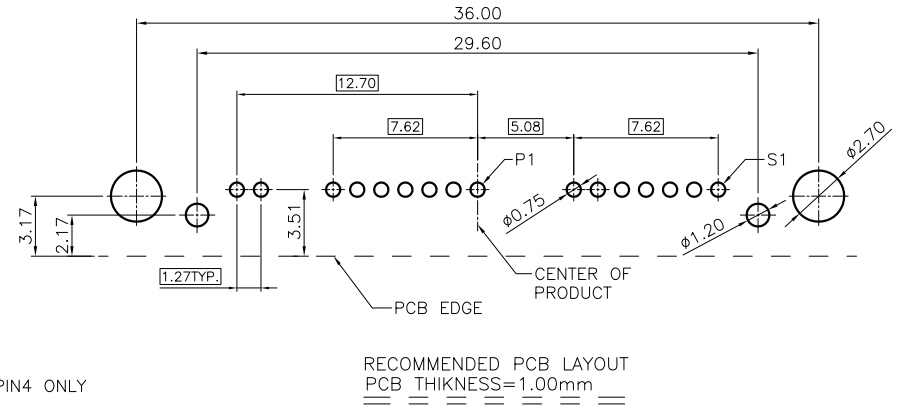

NOTE:

- 1.MATERIAL :  
 BASE : HIGH TEMPERATURE THERMOPLASTIC UL94V-0,  
 TERMINAL:COPPER ALLOY,THICKNESS = 0.30 mm  
 FORKLOCK:BRASS THICKNESS = 0.30 mm
- 2,PLATING:  
 CONTACT:GOLD OVER 50u" MIN NICKEL UNDERPLATE  
 SOLDER TAIL:150u"MIN MISTY TIN 50u" MIN NICKEL  
 UNDERPLATE  
 GOLD SPECIFICATION:SEE TABLE
- 3.ELECTRONICAL SPECIFICATION:  
 CURRENT RATING: 1.5 AMPERE PER CONTACT  
 CONTACT RESISTANCE: 30 MILLIOHMS MAX.  
 INSULATION RESISTANCE: 1000 MEGOHMS MIN.  
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC.  
 OPERATING TEMPERATURE: -40°C~+85°C

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
 X, ±  
 .XX ±  
 .XXX ±  
 ANG ±



ORDER INFORMATION

SATA-SRA038EZ-2+7+7-LF

SERIES LEADFREE  
 FEMALE CLIP 2+7+7 WAY  
 DIP 90° EAR HIGH 3.85mm  
 UPPER CONTACT

DESCRIPTION: SATA 16PIN母頭DIP帶螺絲孔型