





DB25 FEMALE  
MOLDED BEIGE



RJ45 8P8C  
MOLDED BEIGE

| PIN OUT |       |      |                |
|---------|-------|------|----------------|
| DB25F   |       | RJ45 | AC ADAPTOR     |
| 2       | ————— | 3    |                |
| 6       | ————— | 4    |                |
| 4       | ————— |      |                |
| 5       | ————— |      |                |
| 20      | ————— | 5    |                |
| 7       | ————— | 6    |                |
|         |       | 7    | +(120VAC 60Hz) |
|         |       | 8    | -(24VDC 200mA) |



FRONT VIEW      RJ45 8P8C  
COUPLERS      FRONT VIEW

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
煜倫股份有限公司  
www.morethanall.com

|                       |             |                |
|-----------------------|-------------|----------------|
| <b>RoHS Compliant</b> |             | TOLERANCES ARE |
| DRAWING BY CY         |             | X.±            |
| CHECKED BY GENIUS     |             | .X±            |
| UNIT / mm             | SCALE 1 : 1 | .XX±           |
| DATE                  |             | .XXX±          |
| SIZE A4               | PJECTION    | ANG±           |



**ORDER INFORMATION**

**DBRJACFP-25880224-F6F-LF**

SERIES      6 FEET      LEADFREE  
FEMALE      24 AWG  
25 TO 8P8C TO 2 WAY

DESCRIPTION:

**\*\*CONSTRUCTION:**


- CABLE (A): \* UTP (4PR/24#) OD:5.1mm BEIGE PVC JACKET.
- CABLE (B): \* NO UL (1C/24#)\*2 OD:1.4\*2.8mm.

**\*\*CONNECTORS:**

- 1.DB25F:
  - \* D-SUB 25PIN FEMALE SOLDER TYPE.
  - \* PINS: PHOSPHOR BRONZE WITH GOLD PLATED.
  - \* SHELL: STEEL WITH NICKEL PLATED.
  - \* INSULATOR: WHITE COLOR P.B.T UL 94V-0 RATED.
  - \* SCREW: THUMBSCREW #4-40 UNC BEIGE COLOR.
  - \* MOLDED: BEIGE PVC 45P.
- 2.RJ45 PLUG:
  - \* RJ45 8P8C PLUG.
  - \* PINS: PHOSPHOR BRONZE WITH GOLD PLATED 50 MICRON.
  - \* INSULATOR: CLEAN PC INSULATOR.
  - \* MOLDED: BEIGE PVC 60P.
- 3.AC ADAPTOR: \* INPUT:120VAC 60Hz OUTPUT:24VDC 200mA.
- 4.COUPLERS: \* RJ45 8P8C JACK TO JACK MATERIAL:ABS.
- 5.LABEL: \* PRINT: "POWER HARNESS POWER-NR0001".
- 6.TEST: \* CT:2 Ohm IS:5M ohm.
- 7.PACKING: \* PACKED EACH CABLE IN A POLY BAG.
- 8.MATERIAL: \* MATERIAL WITH RoHS GRADE.

**RoHS Compliant**

TOLERANCES ARE

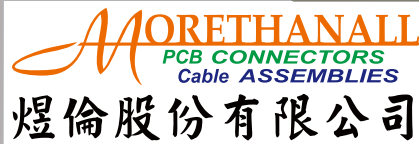

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

P PROJECTION



**ORDER INFORMATION**

**DBRJACFP-25880224-F6F-LF**

SERIES

LEADFREE  
6 FEET  
FEMALE  
24 AWG  
25 TO 8P8C TO 2 WAY

[www.morethanall.com](http://www.morethanall.com)

DESCRIPTION: