


NOTE:

1. WIRE RANGE: AWG 12-10/4-6mm<sup>2</sup>
2. INSULATED COLOR: YELLOW
3. MAXIMUM ELECTRICAL RATING: 75 °C 600 VOLTS 48 AMPERE MAX.

WIRE RANGE AWG/mm <sup>2</sup>	產品編號 ITEM NO.	d2 ±0.20	B ±0.20	F ±0.30	L ±1.00	E ±0.60	d1 ±0.20	D ±0.30
AWG 12-10 4-6 mm <sup>2</sup>	YT-V37S-10	3.7	7.2	7.5	25.2	12.5	3.4	6.5
	YT-V37L-10	3.7	8.5	7.5	25.2			
	YT-V43S-10	4.3	8.5	7.5	25.2			
	YT-V43L-10	4.3	9.5	7.5	25.2			
	YT-V53-10	5.3	9.5	7.5	25.2			
	YT-V65S-10	6.5	9.5	7.5	25.2			
	YT-V65L-10	6.5	12.0	12.0	31.2			
	YT-V84-10	8.4	13.5	10.5	30.0			

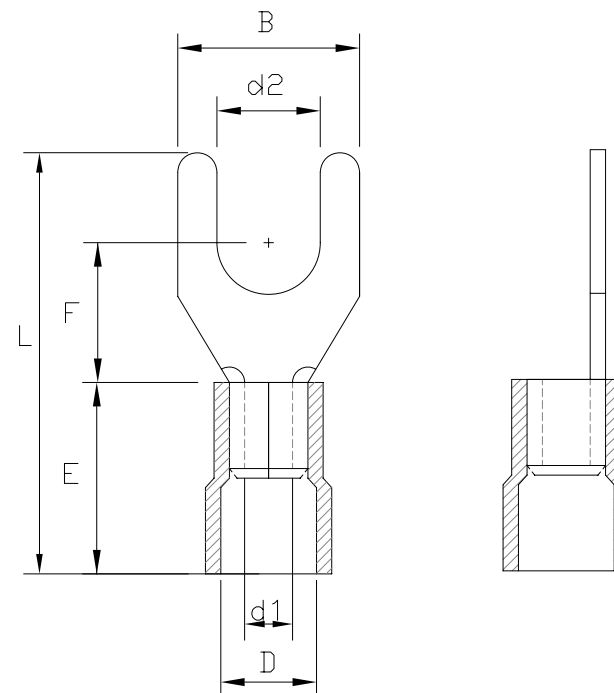

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1:1

.XX±

DATE

.XXX±

ANG±

SIZE A4

PPOJECTION



ORDER INFORMATION

YT-Vxxy-10-LF  
 SERIES | T | LEADFREE  
 | | 10-12AWG  
 | | BLANK:STANDARD  
 | | S.L/ B WIDTH  
 PVC | 37:d2 3.7mm  
 | 43:d2 4.3mm

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: