


P.C.B. LAYOUT
TOP VIEW ± 0.05

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BEIGE
 TERMINAL: COPPER ALLOY, TIN PLATING

SPECIFICATION

CURRENT RATING: 2 AMP MAX
 DIELECTRIC WITHSTANDING: 800V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 20m OHMS MAX
 INSULATION RESISTANCE: 800M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$
 APPLICABLE: AWG #22~#26

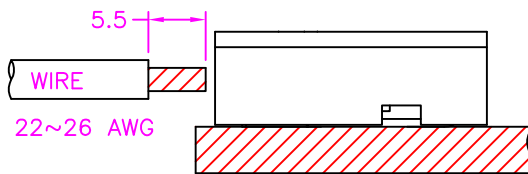

ASSEMBLY

TABLE

POS.	A	B
1	3.00	
2	6.00	3.00
3	9.00	6.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20


DATE

.XXX ± 0.10

ANG \pm

SIZE A4

PJECTION



ORDER INFORMATION

TBY030-W02-xx-LF

SERIES

LEADFREE

01~03 WAY

HIGH 2.45mm

90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: POKE HOME, 3.00mm PITCH, PCB MOUNT, SMT, FEMALE (AWG #22~#26)