

| ITEM 項目 | PARTS NAME 零件名稱 | Q'TY 數量 | MATERIAL 材質 | FINISH/REMARK 處理/備註 |
|------------|--------------------|------------|-----------------|--------------------------------|
| 1 | HOUSING | 1 | L.C.P+G.F | (Black) |
| 2 | CONTACT | 14 | Phosphor Bronze | Gold flash selective lead free |
| 3 | BASE | 1 | L.C.P+G.F | (Black) |
| 4 | SHELL | 1 | Copper alloy | lead free |

NOTES

- 1.MATERIAL: See drawing
- 2.ELECTRICAL
 - 2.1.Insulator resistance: 1000M ohms Min. @ 250 VDC
 - 2.2.Withstanding voltage: 100 VAC / minute
 - 2.3.Contact resistance: 50m ohms Max.
- 3.MECHANICAL
 - 3.1.Durability: 5000 cycles Min.
 - 3.2.Contact retention force: 4.2N(0.43kgf) Min
- 4.PACKING: 500pcs/bag (reference)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE


SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION



ORDER INFORMATION

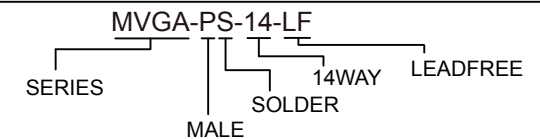

DESCRIPTION: CONNECTOR (Pitch:1.0mm) PLUG IN-14 position