

- NOTES:
- MATERIAL:
    - HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR:NATURAL.
    - CONTACT: COPPER ALLOY
  - FINISH:
    - GOLD FLASH PLATING(1~3u")
    - N:100~200u" MATT TIN PLATING
    - 50~100u" NICKEL UNDERPLATING OVERALL.
  - REFLOW SOLDER CAPABLE TO 260°C

CKT	DimA	DimB	DimC	DimD	DimE
40	11.4	14.7	17.0	18.6	16.2
60	17.4	20.7	23.0	24.6	22.2
80	23.4	26.7	29.0	30.6	28.2
90	26.4	29.7	32.0	33.6	31.2
100	29.4	32.7	35.0	36.6	34.2
120	35.4	38.7	41.0	42.6	40.2
140	41.4	44.7	47.0	48.6	46.2
160	47.4	50.7	53.0	54.6	52.2

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE


SIZE A4

- X. ±
- .X ±
- .XX ±
- .XXX ±
- ANG ±

PJECTION



ORDER INFORMATION

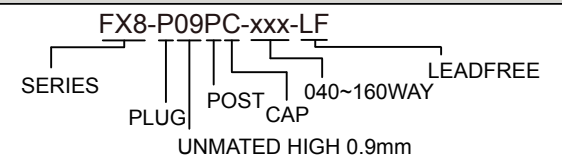

DESCRIPTION: 0.6mm BTB PLUG SMT S/T D/R TYPE