


Note:

- Material: Insulator: PA66+30% G/F UL94V-0
Terminal: Copper alloy



Normal type without post

12	62.0(2.441)	55.0(2.165)	60.2(2.370)
11	57.0(2.244)	50.0(1.969)	55.2(2.173)
10	52.0(2.047)	45.0(1.712)	50.2(1.975)
9	47.0(1.850)	40.0(1.575)	45.2(1.780)
8	42.0(1.654)	35.0(1.378)	40.2(1.583)
7	37.0(1.457)	30.0(1.181)	35.2(1.386)
6	32.0(1.260)	25.0(.984)	30.2(1.189)
5	27.0(1.063)	20.0(.787)	25.2(.992)
4	22.0(.886)	15.0(.591)	20.2(.795)
3	17.0(.669)	10.0(.394)	15.2(.598)
2	12.0(.472)	5.0(.197)	10.2(.402)
CIRCUITS	DIM.A	DIM.B	DIM.C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20


DATE

.XXX ± 0.10

ANG ± 1°

SIZE A4

PJECTION



ORDER INFORMATION



RST50-PRAR7X-xx0xx-LF

SERIES LEADFREE
KEY LOCK TYPE
MALE 02:02WAY
DIP 90° 12:12WAY
NORMAL NON BUMP
7:7.85
R:R TYPE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION:

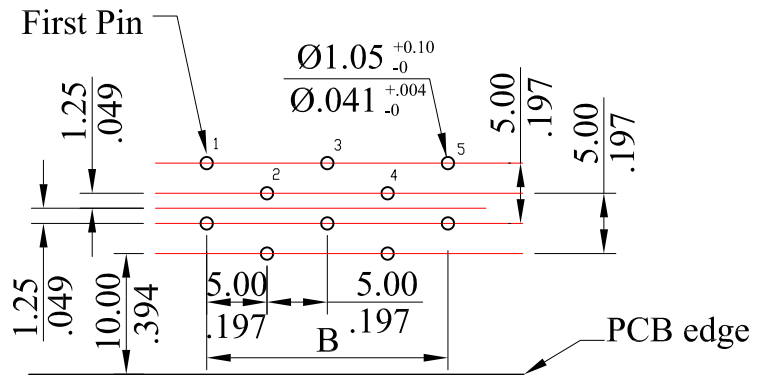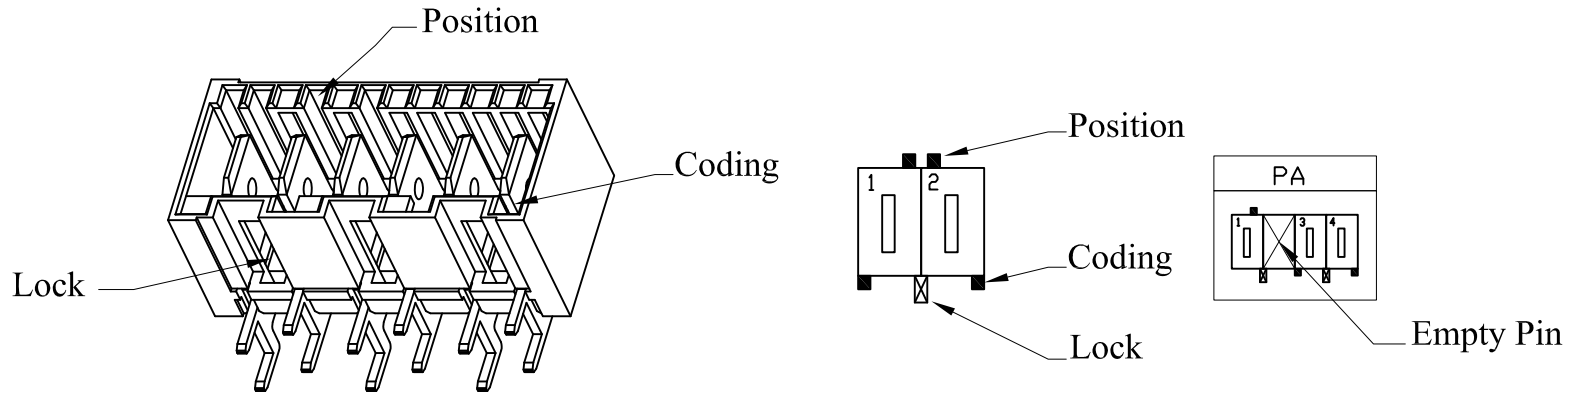

PCB layout for normal

R Type PCB layout for normal

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20


DATE

.XXX ± 0.10

ANG ± 1°

SIZE A4

PPOJECTION



ORDER INFORMATION

RST50-PRAR7X-xx0xx-LF

SERIES LEADFREE
 KEY LOCK TYPE
 MALE 02:02WAY
 DIP 90° 12:12WAY
 NORMAL NON BUMP
 R:R TYPE 7:7.85

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: