


Specifications

Current Rating:3Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:600VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature
 Thermoplastic, UL 94V-0 Nylon(Halogen Free)
 or the equivalent material

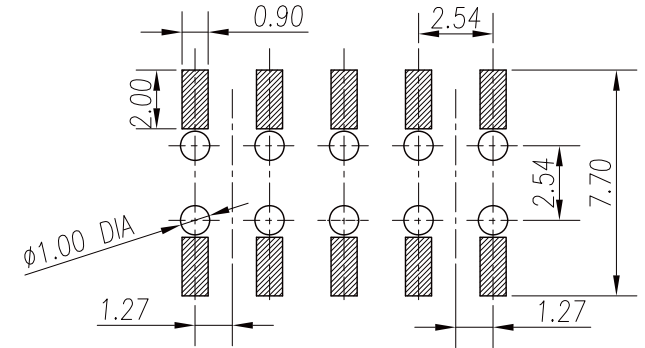

RECOMMENDED P.C.B LAYOUT
FOR TOP ENTRY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X. ± 0.30
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.10
 ANG ±



ORDER INFORMATION

F-Z37X-2Xxx-LF

SERIES

LEADFREE

2X02:04WAY

2X40:80WAY

NON POST

HIGH 3. mm

BOTTOM ENTRY SMT

DESCRIPTION:2.54 FEMALE HEADER DUAL ROWS SMT TYPE CONNECTOR