



RECOMMENDED P.C.B LAYOUT

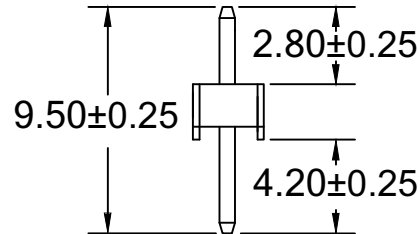

**MATERIAL**  
 HOUSING : NYLON-6T,UL94V-0  
 CONTACT : COPPER ALLOYS

**SPECIFICATION**  
 CURRENT: 3A  
 OPERATING TEMPERATURE: -55°C TO +105°C  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX  
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN  
 WITHSTANDING VOLTAGE : AC 1000V RMS



煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1 : 1  
 DATE  
 SIZE A4

TOLERANCES ARE

X, ±  
 .X ± 0.38  
 .XX ± 0.25  
 .XXX ±  
 ANG ± 5°

PPOJECTION



ORDER INFORMATION

H-D095028042-1X01-LF  
 SERIES | TOTAL 9.5mm | CONTACT 2.8mm | DIP 4.2mm | 01WAY | LEADFREE  
 DIP180°

DESCRIPTION: