

NOTE:




1. MATERIAL:

BASE: GLASS-FILLED P.B.T. 94V-0 (BLACK COLOR)

PIN : BRASS

ORDER NO./DIMENSIONS

CIRCUITS	DIM. A	DIM. B	DIM. C
06	5.08	8.16	10.16
08	7.62	10.70	12.70
10	10.16	13.24	15.24
14	15.24	18.32	20.32
22	25.40	28.48	30.48
24	27.94	31.02	33.02
26	30.48	33.56	35.56
28	33.02	36.10	38.10
30	35.56	38.64	40.64
32	38.10	41.18	43.18
34	40.64	43.72	45.72
36	43.18	46.26	48.26
38	45.72	48.80	50.80
40	48.26	51.34	53.34

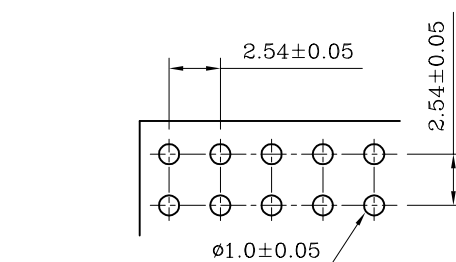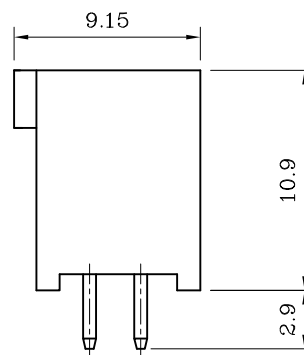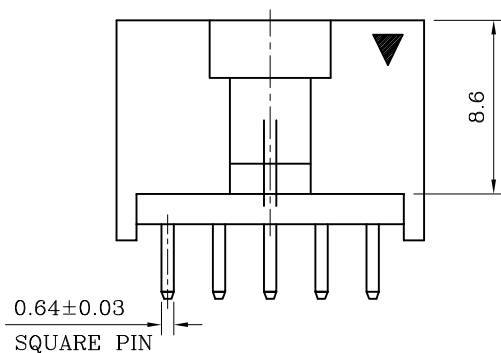

P. C. BOARD LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.12
.XXX ± 0.08
ANG ± 3°

PPOJECTION



ORDER INFORMATION

MCT-DT-2Xxx-LF
SERIES | LEADFREE
2X03: 06WAY
2X20: 40WAY
TIN
DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 2.54mm DUAL ROW STRAIGHT HEADEP