

PCB LAYOUT RECOMMENDED

NOTES:

*Material

Housing: LCP UL 94V-0, Color:Black;
 Contact: Phosphor Bronze;
 Plating: Au plating on contact area;
 Sn (80u" Min.) plating on solder tail;
 Ni (50u" Min.) underplating overall.

*Mechanical


Durability: 3000 Cycles.

*Specification:


Current Rating: 0.5A, 12V AC.;
 Dielectric Withstanding Voltage: AC 500V For 1 Minute;
 Insulation Resistance: 500MΩ Min.;
 Contact Resistance: 100mΩ Max.;

*Environmental

Operating Temperature: -20°C to +60°C;

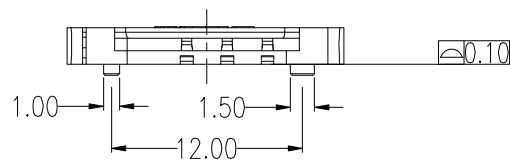

Pin No.	Description
S1	Vcc (Voltage)
S2	RST
S3	CLK
S5	GND
S6	Vpp
S7	I/O



RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ± 0.45
 .X ± 0.35
 .XX ± 0.25
 .XXX ± 0.15
 ANG ±

PJECTION



ORDER INFORMATION

SCV-W2523P-06-LF
 SERIES | | | | LEADFREE
 | | | | 06WAY
 | | | | WITH LOCATING PEG
 | | | | BODY HIGH 2.3mm
 | | | | PAD TO PAD 25.2mm
 90°SMT

DESCRIPTION: Sim Card 6Pin With Post