

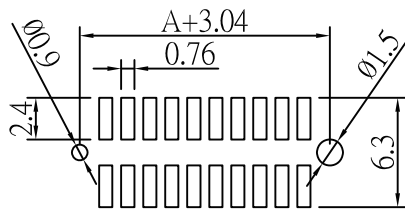


Contact:
 Contact:Brass.
 Insulator:Nylon6T.
 Finish:Gold flash plated over nickel.

| Circuits | Dimension | |
|----------|-----------|-------|
| | A | B |
| 6 | 2.54 | 6.80 |
| 10 | 5.08 | 9.34 |
| 12 | 6.35 | 10.61 |
| 14 | 7.62 | 11.88 |
| 16 | 8.89 | 13.15 |
| 20 | 11.43 | 15.69 |
| 24 | 13.97 | 18.23 |
| 26 | 15.24 | 19.50 |
| 30 | 17.78 | 22.04 |
| 34 | 20.32 | 24.58 |
| 40 | 24.13 | 28.39 |
| 44 | 26.67 | 30.93 |
| 50 | 30.48 | 34.74 |
| 60 | 36.83 | 41.09 |
| 64 | 39.37 | 43.63 |
| 66 | 40.64 | 44.90 |
| 68 | 41.91 | 46.17 |
| 80 | 49.53 | 53.79 |
| 100 | 62.23 | 66.49 |

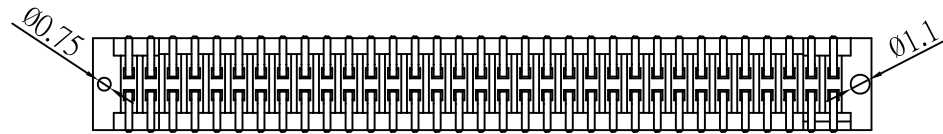

P.C.Board Layout

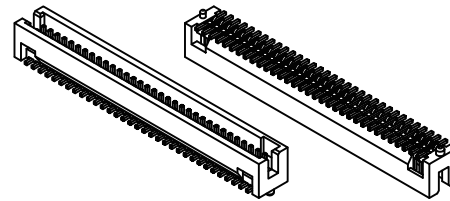

RoHS Compliant

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PJECTION



ORDER INFORMATION

PAB-V16P-2Xxx-LF



DESCRIPTION: