


### ELECTRONICAL CHARACTERISTICS

% OF AMP. RAT.	OPENING TIME
110%	100 HOURS, MINIMUM
135%	1800 SECONDS, MAXIMUM
200%	5 SECONDS, MAXIMUM
350%	0.08 SECONDS, MINIMUM

### ORDERING INFORMATION


CAT. NO.	AMP. RAT.	VOL. RAT.	COLOR CODE.
	3A	32A	VIOLET
	4A	32A	PINK
	5A	32A	TAN
	7.5A	32A	BROWN
	10A	32A	RED
	15A	32A	LT. BLUE
	20A	32A	YELLOW
	25A	32A	NATURAL
	30A	32A	GREEN
	35A	32A	LT. GREEN
	40A	32A	ORANGE

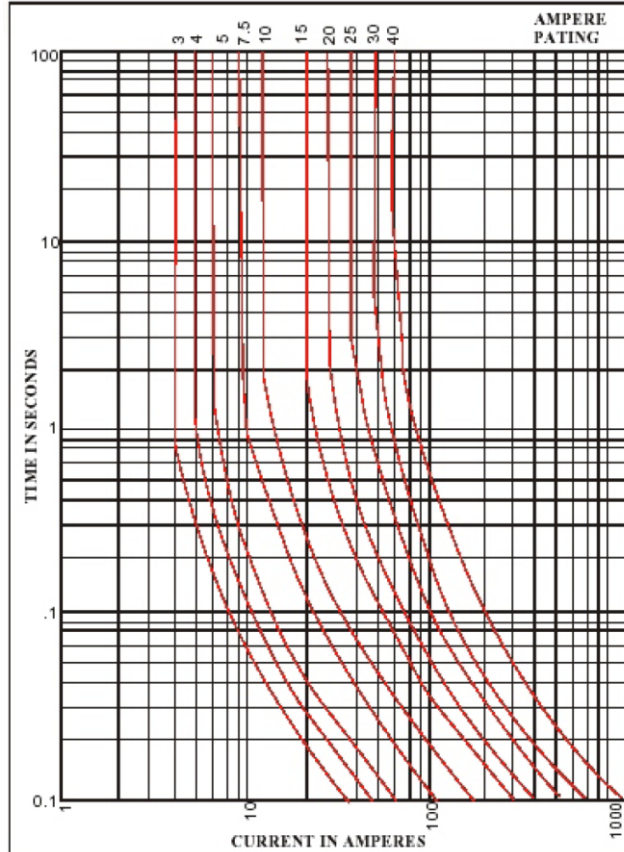

### CLIP, HOLD, AUTO FUSE



### DIMENSIONS

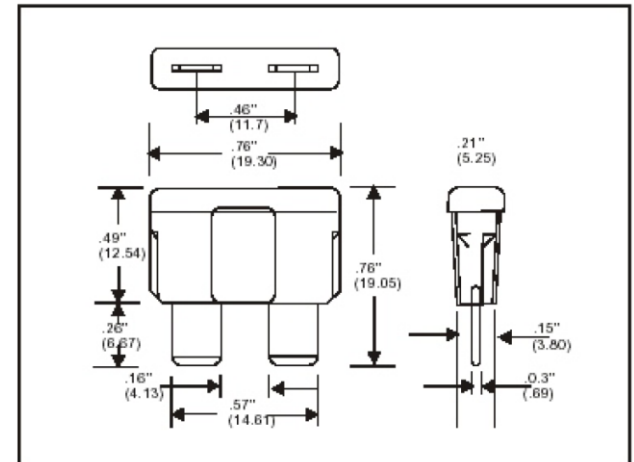

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION



### ORDER INFORMATION

FUA-xxA-xx-LF

SERIES	LEADFREE
03A:3A	VI:VIOLET YE:YELLOW
04A:4A	PK:PINK GR:GREEN
05A:5A	BR:BROWN OR:ORANGE
	RD:RED
40A:40A	BL:LT.BLUE

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com